

LED Series

LED Constellation Medium Full Cutoff Wall Pack



WPC15

Housing:

Die Cast Aluminum Housing & Hinged Full Cutoff Front Frame, 1/2" Coin Plugs with O-rings for Conduit & Photocell, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating

Mounting:

Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use 1/2" Surface Conduit.

LG LED Module:

Luminous Flux: See Chart
CRI: 80+, CCT: 4000K, 5700K or 6500K
Operating Temperature: -40 ~ 50°C
50,000 Hours
Module has IP67 Rating
RoHS Compliant
R9: -0.9

Wattage:

LED: 3 x 9 or 12w

Driver:

Electronic Driver, 120-277V, 50/60Hz
Power Factor: .90
Input Current: 0.9A@120VAC
Current: .53mA
THD: ≤20%

System Wattage: 13.6w per Module

Listing & Ratings:

CSA: Listed for Wet Locations
Meets Dark Sky Requirements

LM-79 Report Available on Select Models.

Options:

Dimmable Driver
2.5KV Surge Protection

Custom Colors Available Upon Request.

DESIGNLIGHTS CONSORTIUM

DesignLights Consortium Qualified Luminaires:
WPC15LF3X12U57K

LED Constellation Medium Full Cutoff Wall Pack

Catalog

Description

Example: WPC15LF3X12U4KZSP

WPC15	Model:	WPC15
L	LED Mfr:	L=LG Innotek
F	Optics:	F=Medium Beam Spread
3X	Number of Modules:	3X=Three
12	Wattage:	9=9w, 12=12w
U	Ballast:	U=120-277V
4K	CCT:	4K=4000K, 57K=5700K, 65K=6500K
Z	Color:	Z=Bronze
-	Mounting:	N/A
SP	Options:	L3=HB350W-L3 Wattstopper Occupancy Sensor, 20' Height L4=HB350W-L4 Wattstopper Occupancy Sensor, 40' Height SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

LD

LED
lighting
facts
LED Product Partner

Total Luminous Flux per Module		Optic Type					
		C		F		I	
		12w	9w	12w	9w	12w	9w
CCT	6500K	1288	850	1345	888	1296	856
	5700K	1288	850	1345	888	1296	856
	4000K	1076	710	1100	726	1088	718

Catalog #	Description
HB350W-L3	Wattstopper Passive Infrared Occupancy Sensor, Wet Location, 360° Lens, 40' Diameter Coverage From 20' Height, 120/277V
HB350W-L4	Wattstopper Passive Infrared Occupancy Sensor, Wet Location, 360° Lens, 60' Diameter Coverage From 40' Height, 120/277V

LD


LED Series

LED Constellation Medium Full Cutoff Wall Pack



HB350W-L3/L4

— ■ CONTROLLED WITH **WattStopper**®

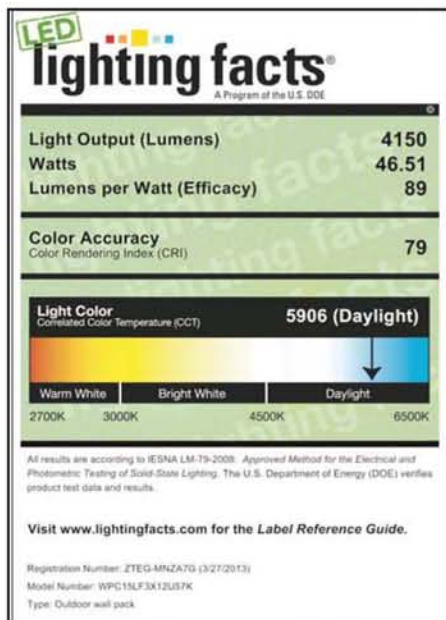

*LM-79 Report Available.
DesignLights Consortium Qualified Luminaire.*