


## IIS MICRO-INVERTER - HIGH EFFICIENCY

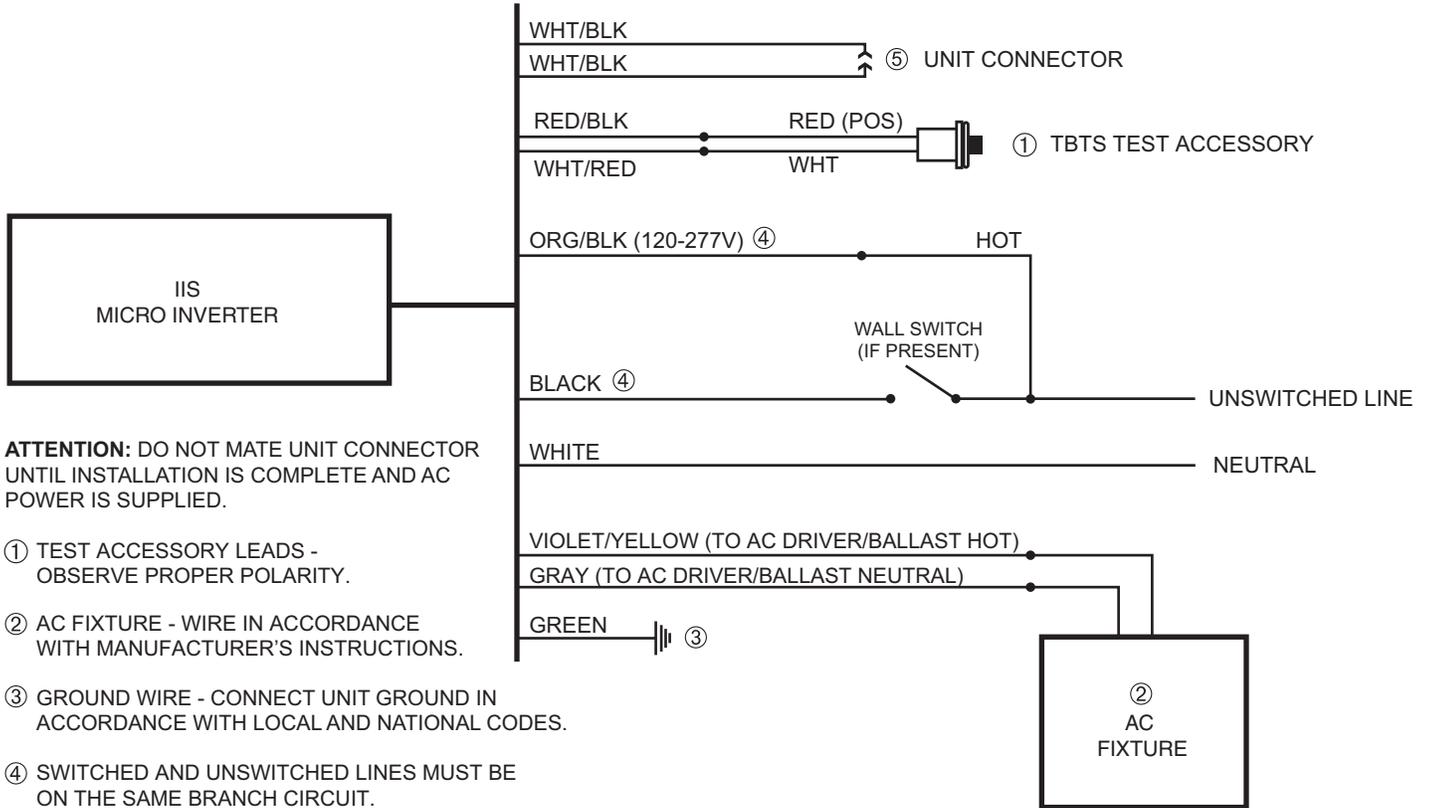

**ATTENTION:** DO NOT MATE UNIT CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.

- ① TEST ACCESSORY LEADS - OBSERVE PROPER POLARITY.
- ② AC FIXTURE - WIRE IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
- ③ GROUND WIRE - CONNECT UNIT GROUND IN ACCORDANCE WITH LOCAL AND NATIONAL CODES.
- ④ SWITCHED AND UNSWITCHED LINES MUST BE ON THE SAME BRANCH CIRCUIT.
- ⑤ MATE UNIT CONNECTOR AFTER INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.

IIS\_MICRO\_HE.EPS

**NOTES**