


ICN-2S110-SC@120V

| | |
|-----------------|-------------|
| Brand Name | CENTIUM |
| Ballast Type | Electronic |
| Starting Method | Rapid Start |
| Lamp Connection | Series |
| Input Voltage | 120-277 |
| Input Frequency | 50/60 HZ |
| Status | Active |

Electrical Specifications

| Lamp Type | Num. of Lamps | Rated Lamp Watts | Min. Start Temp (°F/C) | Input Current (Amps) | Input Power (ANSI Watts) | Ballast Factor | MAX THD % | Power Factor | MAX Lamp Current Crest Factor | B.E.F . |
|--------------|---------------|------------------|------------------------|----------------------|--------------------------|----------------|-----------|--------------|-------------------------------|---------|
| F48T12/HO | 1 | 60 | -20/-29 | 0.43 | 49 | 1.15 | 10 | 0.95 | 1.7 | 2.35 |
| F48T12/HO | 2 | 60 | -20/-29 | 0.82 | 93 | 0.90 | 10 | 0.95 | 1.7 | 0.97 |
| F60T12/HO | 1 | 75 | -20/-29 | 0.52 | 59 | 1.10 | 10 | 0.95 | 1.7 | 1.86 |
| F60T12/HO | 2 | 75 | -20/-29 | 0.98 | 116 | 1.00 | 10 | 0.98 | 1.7 | 0.86 |
| F72T12/HO | 1 | 85 | -20/-29 | 0.63 | 72 | 1.10 | 10 | 0.95 | 1.7 | 1.53 |
| F72T12/HO | 2 | 85 | -20/-29 | 1.19 | 140 | 0.90 | 10 | 0.98 | 1.7 | 0.64 |
| F96T12/HO | 1 | 110 | -20/-29 | 0.88 | 100 | 0.91 | 10 | 0.95 | 1.6 | 0.91 |
| * F96T12/HO | 2 | 110 | -20/-29 | 1.64 | 194 | 0.89 | 10 | 0.98 | 1.6 | 0.46 |
| F96T12/HO/ES | 1 | 95 | 60/16 | 0.68 | 78 | 0.91 | 10 | 0.95 | 1.6 | 1.17 |
| F96T12/HO/ES | 2 | 95 | 60/16 | 1.30 | 154 | 0.89 | 10 | 0.98 | 1.6 | 0.58 |

Wiring Diagram

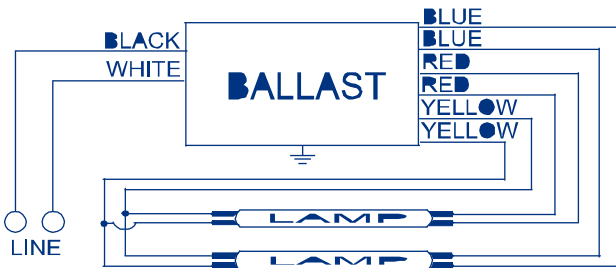


The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

| | in. | cm. | | in. | cm. |
|--------|-----|-------|--------------|-----|-----|
| Black | 25 | 63.5 | Yellow/Blue | | 0 |
| White | 25 | 63.5 | Blue/White | | 0 |
| Blue | 46 | 116.8 | Brown | | 0 |
| Red | 46 | 116.8 | Orange | | 0 |
| Yellow | 79 | 200.7 | Orange/Black | | 0 |
| Gray | | 0 | Black/White | | 0 |
| Violet | | 0 | Red/White | | 0 |

Enclosure

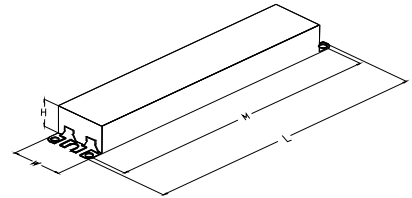

Enclosure Dimensions

| OverAll (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 9.50 " | 1.7 " | 1.18 " | 8.90 " |
| 9 1/2 | 1 7/10 | 1 9/50 | 8 9/10 |
| 24.1 cm | 4.3 cm | 3 cm | 22.6 cm |

Revised 07/28/2010



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

| ICN-2S110-SC@120V | |
|--------------------------|-------------|
| Brand Name | CENTIUM |
| Ballast Type | Electronic |
| Starting Method | Rapid Start |
| Lamp Connection | Series |
| Input Voltage | 120-277 |
| Input Frequency | 50/60 HZ |
| Status | Active |

Electrical Specifications

Notes:

Section I - Physical Characteristics

- 1.1 Ballast shall be physically interchangeable with standard electromagnetic or standard electronic ballasts, where applicable.
- 1.2 Ballast shall be provided with integral leads color-coded per ANSI C82.11.

Section II - Performance Requirements

- 2.1 Ballast shall be _____ (Instant, Rapid or Programmed) Start.
- 2.2 Ballast shall provide Independent Lamp Operation (ILO) for Instant Start ballasts allowing remaining lamp(s) to maintain full light output when one or more lamps fail.
- 2.3 Ballast shall contain auto restart circuitry in order to restart lamps without resetting power (except T8/HO and FT5 ballasts).
- 2.4 Ballast shall operate from 60 Hz input source of 120V, 277V or 347V as applicable with sustained variations of +/- 10% (voltage and frequency). IntelliVolt models shall operate from 50/60 Hz input source of 120V through 277V with sustained variations of +/- 10% (voltage and frequency).
- 2.5 Ballast shall be high frequency electronic type and operate lamps at a frequency above 42 kHz ("GCN" models between 20 kHz and 30kHz) to avoid interference with infrared devices and eliminate visible flicker.
- 2.6 Ballast shall have a Power Factor greater than 0.98 for primary lamp.
- 2.7 Ballast shall have a minimum ballast factor for primary lamp application as follows: 0.75 for Low Watt, 0.85 for Normal Light Output and 1.20 for High Light.
- 2.8 Ballast shall provide for a Lamp Current Crest Factor of 1.7 or less.
- 2.9 Ballast input current shall have Total Harmonic Distortion (THD) of less than 20% for Standard models and THD of less than 10% for Centium models when operated at nominal line voltage with primary lamp.
- 2.10 Ballast shall have a Class A sound rating for all 4-foot lamps and smaller.
- 2.11 Ballast shall have a minimum starting temperature of _____ [-18C (0F) for standard T8 and Long Twin Tube lamps, 10C (50F) for standard T12 lamps, 0C (32F) for Slimline T8 lamps and "GCN" models, -29C (-20F) for T8/HO lamps,] for primary lamp application. Ballast shall have a minimum starting temperature of 60F (16C) for energy-saving lamps.
- 2.12 Ballast shall tolerate sustained open circuit and short circuit output conditions.

Section III - Regulatory Requirements

- 3.1 Ballast shall not contain any Polychlorinated Biphenyl (PCB).
- 3.2 Ballast shall be Underwriters Laboratories (UL) listed, Class P and Type 1 Outdoor; and Canadian Standards Association (CSA) certified where applicable.
- 3.3 Ballast shall comply with ANSI C62.41 Category A for Transient protection.
- 3.4 Ballast shall comply with ANSI C82.11 where applicable.
- 3.5 Ballast shall comply with the requirements of the Federal Communications Commission (FCC) rules and regulations, Title 47 CFR part 18, Non-Consumer (Class A) for EMI/RFI (conducted and radiated).
- 3.6 Ballast shall comply with NEMA 410 for in-rush current limits.

Section IV - Other

- 4.1 Ballast shall be manufactured in a factory certified to ISO 9001 Quality System Standards.
- 4.2 Ballast shall carry a five-year warranty from date of manufacture against defects in material or workmanship, including replacement, for operation at a maximum case temperature of 70C.
- 4.3 Manufacturer shall have a twenty-year history of producing electronic ballasts for the North American market.

Note: Energy saving T8 lamps (25W, 28W or 30W) may experience lamp striations if operated on ballasts not rated for their use.

Revised 07/28/2010



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886