

Specification:

Lamp Type	LED	
EXIT Sign Lamp Wattage	Red	120VAC, 60Hz, 0.031A, 3.2W
		277VAC, 60Hz, 0.010A, 3.6W
	Green	120VAC, 60Hz, 0.033A, 3.8W
		277VAC, 60Hz, 0.017A, 4.4W
Emergency Operation		

Lamp Type	LED: exit sign, Incandescent: emergency	
Emergency Lamps Wattage	Self Powered	120VAC, 60Hz, 0.10A, 10W
		277VAC, 60Hz, 0.05A, 10W
	Self Diagnostic	120VAC, 60Hz, 0.12A, 15W
		277VAC, 60Hz, 0.60A, 15W
Emergency Operation	90 minutes	


Model: FHEC31



Listings & Certifications:



Mechanical Data:

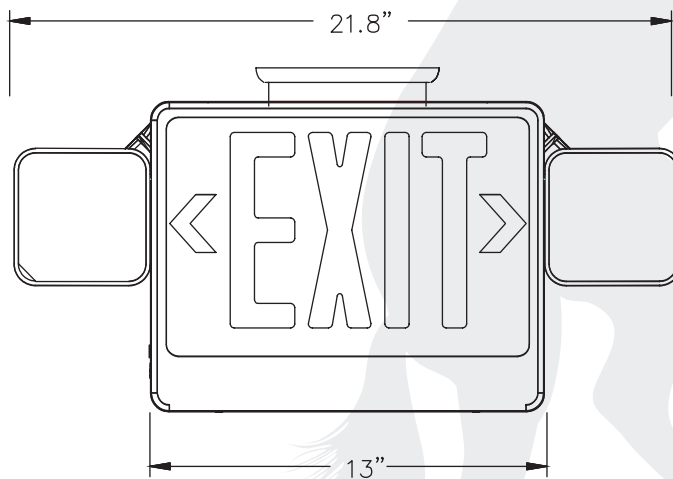

Standard Features:

- Push-to-test Switch
- LED Charge Indicator
- Maintenance free, 6V sealed lead-acid battery
- Dual Voltage 120V/277V
- Specification Grade Design
- Universal Mount
- Long Life Energy Saving LED light source
- Field replaceable snap out/in chevron directional indicator.
- Snap-fit faceplate installs without use of tools
- Universal single face and double face (extra faceplate included)
- Fully adjustable glare free lighting heads
- Universal mounting pattern knockout in backplate for J-box mounting
- Two 5.4W DC 5 wedge-base lamps for emergency
- Remote Capable Option yields 12W extra capacity
- Damp Location Listed

Mechanical Data:

Base Model No.	Case Color	Letter Color	Options
FHEC31	W - White	R - Red	SD - Self Diagnostic
	B - Black	G - Green	RC - Remote Capable

Build part number by adding Base Model No., one of each Case Color, and Letter Color, and desired options code. Example: FHEC31-WR-SD

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years (excluding lamps) from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.