

MINICANDLE

Compact Fluorescent Lamp



YCONVERTERE2C
(E26)



SKC7CWW




SKC7CFWW

PRODUCT FOCUS

MINICANDLE

Compact Fluorescent Lamp

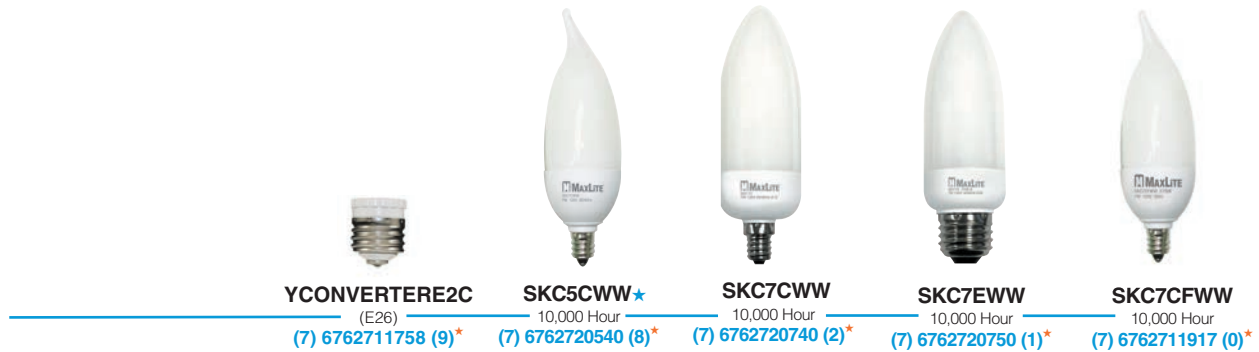

MINICANDLESPECIFICATIONS

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Dimensions (W" x MOL")	K
★ 5	20540	SKC5CWW Candle Flame Tip E12 Base	25	220	10,000	Box	24	1.42 x 4.84	2700
7	20740	SKC7CWW Candle E12 Base	30	340	10,000	Box	24	1.42 x 4.84	2700
7	20750	SKC7EWW Candle E26 Base	30	340	10,000	Box	24	1.46 x 3.86	2700
7	70608	SKC7CFWW Candle Flame Tip E12 Base	30	340	10,000	Box	24	1.42 x 4.84	2700
	70455	YCONVERTERE2C E12 to E26 Base Adapter				Bulk	25	.8 x 1.13	

SPECIAL NOTES

- >> Not for use on circuits with dimmers, timers, or other control devices.
- >> Converters sold separately for conversion from Candelabra Base to Edison Base

APPLICATIONS

- Chandeliers
- Wall Sconces
- Ambient Decorative Lighting

LOCATIONS

- Residential
- Restaurant
- Retail
- Hotel/Motel
- Property Management

BENEFITS

- Decorative shape and ultra-small size fit most standard and smaller fixtures
- E12-E26 Base Converter Available
- Saves up to 75% in energy costs
- Long Life – Lasts 10,000 hours
- Instant-on, flicker-free electronics
- Soft natural light with excellent color rendering

SPECIFICATIONS

- Ballast Type >> Electronic
- Starting Method >> Instant Start
- Input Line Voltage >> 120VAC
- Input Line Frequency >> 50/60HZ
- Mini. Starting Temp. >> 0°F
- Max. Operating Temp. >> 100°F
- Color Rendering Index >> 84

MAX11210-06-24



FCC Certified
ISO 9002 Certified
★ UPC Codes
★ ENERGY STAR®
Qualified



This device complies with Part 18 of the FCC rules. If interference occurs move this product away from the device or plug into a different outlet. This product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45-30MHz.