


### LINEAR FLUORESCENT LAMPS - T5(TCLP COMPLIANT)

- High efficacy • Long life, up to 20,000 hours
- Less mercury contained
- High CRI • High output

Watts	Bulb	Base	Item#	Description	Case Qty.	Dimensions		Lumens			Color		Manufacture Production Code
						MOL (in)		Initial (lm)	Mean (lm)	Avg.Life (Hours)	Temp (K)	CRI	
<b>Fluorescent Lamps - High Output (T5)</b>													
24	T5	Mini Bi-Pin	4115	FL24/T5/830/HO	50	22.2		2000	1880	20000	3000	85	F02421518301
			4116	FL24/T5/835/HO	50	22.2		2000	1880	20000	3500	85	F02421518351
			4117	FL24/T5/841/HO	50	22.2		2000	1880	20000	4100	85	F02421518411
			4118	FL24/T5/850/HO	50	22.2		2000	1880	20000	5000	85	F02421518501
			4119	FL24/T5/865/HO	50	22.2		2000	1880	20000	6500	85	F02421518651
39	T5	Mini Bi-Pin	4120	FL39/T5/830/HO	50	33.39		4900	4606	20000	3000	85	F03921518301
			4121	FL39/T5/835/HO	50	33.39		4900	4606	20000	3500	85	F03921518351
			4122	FL39/T5/841/HO	50	33.39		4900	4606	20000	4100	85	F03921518411
			4123	FL39/T5/850/HO	50	33.39		4900	4606	20000	5000	85	F03921518501
			4124	FL39/T5/865/HO	50	33.39		4900	4606	20000	6500	85	F03921518651
54	T5	Mini Bi-Pin	4125	FL54/T5/830/HO	50	45.20		5000	4700	20000	3000	85	F05421518301
			4126	FL54/T5/835/HO	50	45.20		5000	4700	20000	3500	85	F05421518351
			4127	FL54/T5/841/HO	50	45.20		5000	4700	20000	4100	85	F05421518411
			4128	FL54/T5/850/HO	50	45.20		5000	4700	20000	5000	85	F05421518501
			4129	FL54/T5/865/HO	50	45.20		5000	4700	20000	6500	85	F05421518651
80	T5	Mini Bi-Pin	*4135	FL80/T5/830/HO	50	57.09		7000	6580	20000	3000	85	F08021518301
			*4136	FL80/T5/835/HO	50	57.09		7000	6580	20000	3500	85	F08021518351
			*4137	FL80/T5/841/HO	50	57.09		7000	6580	20000	4100	85	F08021518411
			*4138	FL80/T5/850/HO	50	57.09		7000	6580	20000	5000	85	F08021518501
			*4139	FL80/T5/865/HO	50	57.09		7000	6580	20000	6500	85	F08021518651

\* Items only available for special orders

All measurements are shown in inches unless noted  
 Manage in Accordance with Disposal Laws  
 See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-866-666-6850

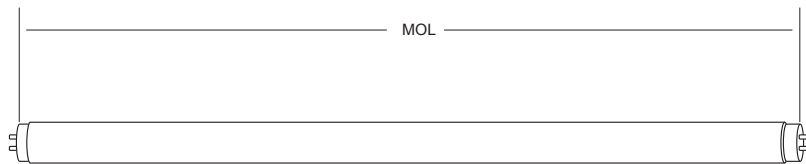

T5  
Mini Bi-Pin Base