


NOTES:

1. Before starting of installation, please read this leaflet and keep it for future reference;
2. To avoid possible electrical shock, be sure that power supply is turned off at fuse box or circuit breaker before installing or servicing fixture;
3. During installation do not let the product surface rub against other hard objects or dropped on the floor, otherwise the product will be damaged;
4. Risk of Fire Supply conductors (power wires) connecting the fixture must be rated minimum 90 °C If uncertain consult an Electrician;
5. The down light must be securely mounted; the bare wires of the power cord must be properly insulated to prevent electrical hazards;
6. Before installation of any recessed lighting luminaire check your local electrical code. This code sets the wiring standards for your locality and should be carefully studied before starting;
7. Protect the light from dust and dirt when painting or during construction;
8. Clean with a soft damp cloth only, do not use any chemical cleaners;
9. Before installation of any recessed lighting luminaire check your local electrical code. This code sets the wiring standards for your locality and should be carefully studied before starting.
10. INPUT: 120~277Vac 50/60Hz Power: 50W

Model : LED-8045M27K / LED-8045M42K / LED-8045M57K

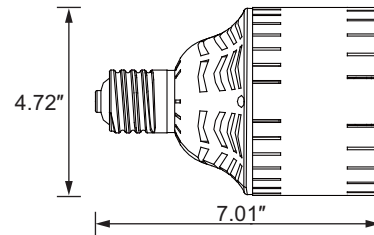

IMPORTANT SAFETY INSTRUCTIONS

LED RETROFIT LUMINAIRE CONVERSION

FOR USE ONLY WITH HID LUMINAIRES. IN ACCORDANCE WITH THE INSTRUCTIONS PROVIDED WITH THIS RETROFIT KIT.

“WARNING - Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.”

WARNING - Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings.

WARNING - Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

“WARNING - SUITABLE FOR DAMP LOCATIONS. Not for use with ballast. SUITABLE FOR USE IN ENCLOSE LUMINAIRES.

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.

DOUBLE INSULATION”

Housings:

This LED Retrofit luminaire has E39 Edison screw-base and is UL listed for installation, compatible to recessed housing. The lamps of housing for the minimum height of the dimension is min 5.51 inch, diameter is 5.51 inch.

Warranty:

As with any electrical installation, a qualified electrician must ensure compatibility of use with a particular housing; this includes all applicable national and local electrical and building codes. Installer is responsible to securely retain the LED Module in a housing at time of installation.

Installation

Step 1- Disconnect electrical power to fixture prior to retrofit. (See FIG:1)

Step 2- Remove the ballast where applicable.

Step 3- Connect the two common Wires from power source directly to corresponding leads on socket. NOTE: The screwshell of the lampholder shall be CONNECT to the NEUTRAL wire (white or gray)

Step 4- Thread the socket into the socket.

Step 5- Affix the Replacement Marking lable to the fixture where it will be visible during relamping.

Step 6- Turn on electrical power to fixture. (See FIG: 2)


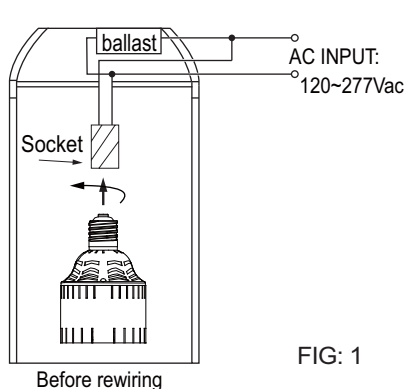


FIG: 1

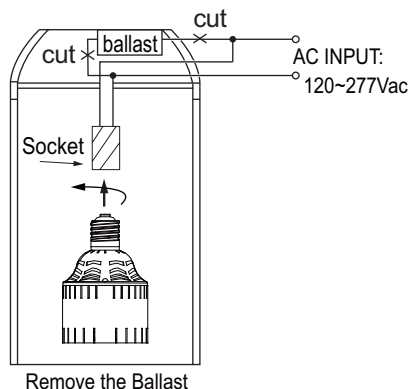

Remove the Ballast

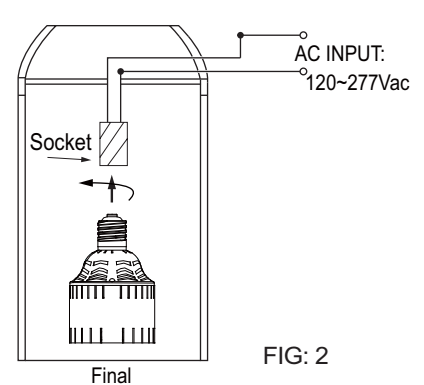


FIG: 2