




RR6

INCLUDING RR6-GU24, RR6-277V

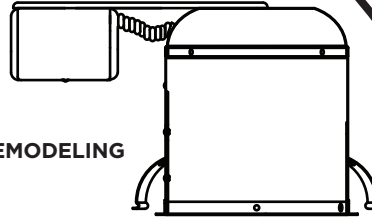

INSTALLATION INSTRUCTIONS & 6 1/4" TEMPLATE FOR REMODELING

The RC6 family is for use with Cree LR6 Products of the appropriate voltage only

STEP 1

Use this template to draw a circle in the desired location.

STEP 2

Accurately cut the hole out of the ceiling.

STEP 3

Using flexible metal conduit, supply AC input wires through opening..

STEP 4

Open RR6 junction box door and pry off a conduit knockout opening in the side of the junction box. Attach conduit to the junction box securely and route wires inside the box for connection. See wiring diagram on reverse for proper connections.



STEP 5

After wires are connected as shown, close the cover on the junction box.

STEP 6



With clips rotated inside the can (Fig. 1) insert remodeler can into the ceiling starting with the junction box first.

STEP 7


Hold the can up flush to the ceiling surface and push the clips through the slots on the housing.

STEP 8

To lock the clips in place, push the flat portion against the side of the can and push up until clip locks into place. **CONTINUE TO BACK**



RR6 WIRING DIAGRAM

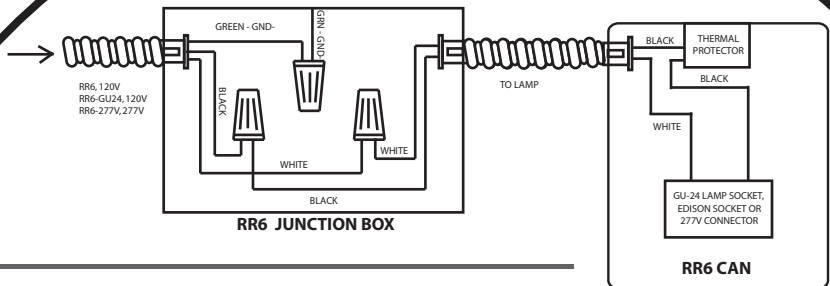


STEP 9

To release the clips, pull down clip.

STEP 10

Now the RR6 is ready to install the LR6.

NOTE: In areas where excessive ceiling vibration can occur, we suggest using a 1/4 x 14 x .5" sheet metal screw to further lock the clips against the housing. Drive the screws through the slots in the clips and into the can.



CREE® TRUEWHITE® TECHNOLOGY FIXTURE ACCESSORY LIMITED CONSUMER WARRANTY

The limited warranty set forth below is given by the Cree company listed below ("Seller") with respect to the lighting product packaged with this limited warranty (the "Product"). Your Product, when delivered to you in new condition in its original packaging, is warranted against defects in materials or workmanship as follows: for a period of ONE (1) YEAR from the date of original purchase, defective parts or a defective Product returned with the sales receipt as proof of purchase to Seller, or its authorized service providers, as applicable, and proven to be defective upon inspection, will be repaired, or exchanged for a new Product, as determined by Seller, or the authorized service provider. This limited warranty covers all defects encountered in normal use of the Product, and does not apply in the following cases: Loss of or damage to the Product due to acts of God; fire; vandalism; civil disturbances; power surges; improper power supply; electrical current fluctuations; corrosive environment installations; induced vibration; harmonic oscillation or resonance associated with movement of air currents around the product; abuse; alteration; accident; mishandling; failure to follow operating, maintenance or environmental instructions prescribed by Seller in writing or services performed by someone other than Seller or its authorized service provider. **WARRANTY IS VOID IF PRODUCT IS NOT USED FOR THE PURPOSE FOR WHICH THIS PRODUCT IS MANUFACTURED.**

Any complaints you may have regarding the Product should be addressed to Ruud Lighting, Inc., 9201 Washington Avenue, Racine, WI 53406. Seller shall have no liability under this warranty unless Seller is notified in writing within sixty (60) days after your discovery of the defect and the defective items are promptly returned to Seller, freight prepaid, and received by Seller. This warranty excludes field labor and service charges related to the repair or replacement of the product.

NO IMPLIED WARRANTY, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, APPLIES TO THE PRODUCT AFTER THE APPLICABLE PERIOD OF THE EXPRESS LIMITED WARRANTY STATED ABOVE, AND NO OTHER EXPRESS WARRANTY OR GUARANTY GIVEN BY ANY PERSON OR ENTITY WITH RESPECT TO THE PRODUCT SHALL BIND SELLER. (SOME STATES AND PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.)

www.cree.com/lighting

LPN00015_H