

LED Shoe Box light/ Parking Lot light

BY RN/26Y /7M/AAA '"/BY RN/6: Y /7M/AAA



I . Application :

Parking Lot lighting, wall lighting area, street lighting.etc.

II . Features:

- 1 Module lens design makes the lamp own well suited lighting distributing for LED parking lot lighting.
 - 2 Hollow out heat sink design makes the lamp lighter and better at heat dissipation.
 - 3 Installation angle -90° ~ $+90^{\circ}$ adjustable.
 - 4 Beautiful appearance, using Samsung LED chips and high quality driver.
 - 5 IP65. Owing ETL & DLC certificates.
 - 6 Multifarious mounting brackets and beam angles are available.
-

DY RN/46Y /7M/~~KKC~~ / **BY RN/6: Y /7M/**~~KKC~~

Technical drawing of a rectangular device with dimensions and a detail view. The main drawing shows a rectangular device with a central array of circular elements. Dimensions are indicated as follows:


- Overall width: $1.19'$
- Distance from left edge to center of array: $0.9'$
- Overall height: $0.9'$
- Distance from top edge to center of array: $0.21'$
- Distance from bottom edge to center of array: $0.17'$
- Distance from right edge to center of array: $0.58'$

A detail view on the right shows a cross-section of the device, revealing internal components and a central circular feature.




Model	CCT	CRI	Luminous Flux	System Power	Product Size (ft)	Package Size (ft)	Quantity of LED chip	N.G.	W.G.
DY RN46Y /7W/CCC	7222M	≥70	2400LM	44W	0.90*1.19*0.58	1.79*1.15*0.44	10 pcs	4.4 KG	4.9 KG
DY RN6: Y /7W/CCC	7222M	≥70	6800NM	48W	0.90*1.19*0.58	1.79*1.15*0.44	20 pcs	4.4 KG	5.1 KG
Input Voltage: AC 90V~277V									
Efficiency of power supply>0.9									
Storage Temperature: - 40 ~ 50℃									

IV. Optical data: Type 3

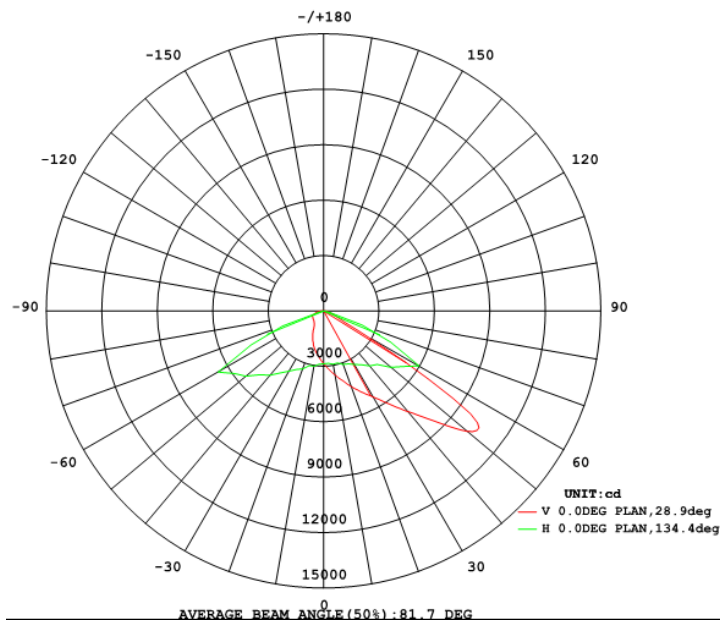

Type A Pole diameter: \varnothing 0. 2'

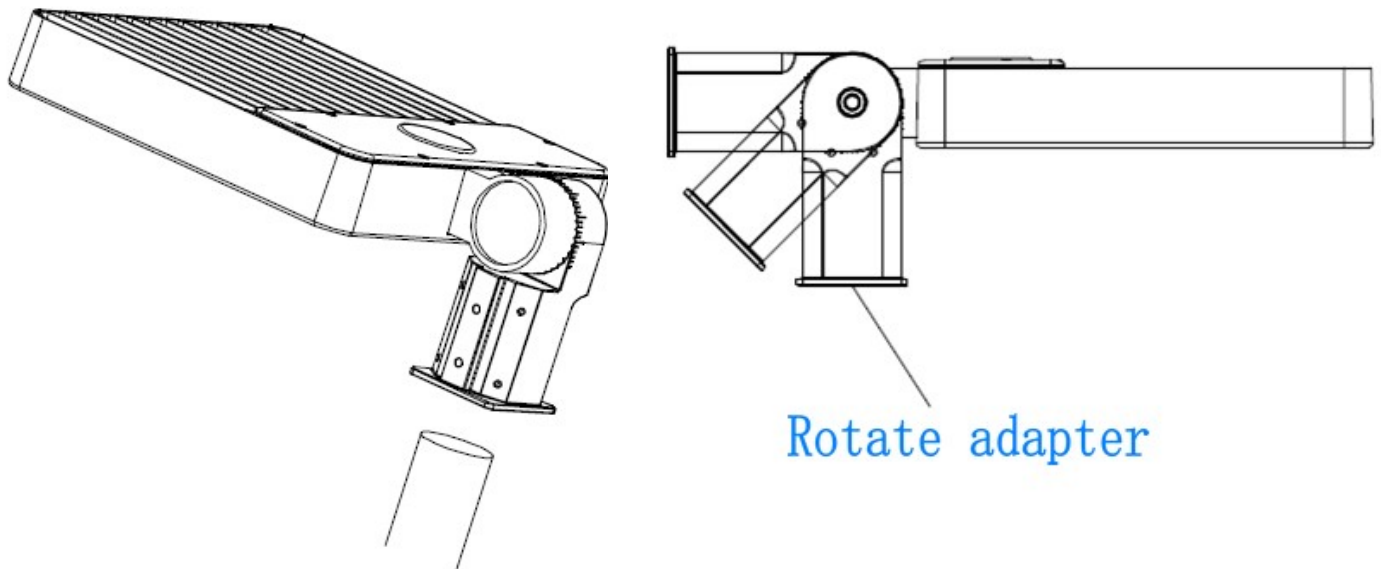

VI. Installation Caution

- 1、 Make sure the power has been turned off before maintenance.
- 2、 Clean the lens cover regularly to maintain high transmission of light.
- 3、 Clean up the dust from the reflector and heat sink regularly to keep sound heat dispersion.
- 4、 Be careful not to use water or corrosive solution for cleaning, preferably with a dry cloth.
- 5、 When install or replace power supply, directly open the back cover with a screwdriver, then remove the power supply. There are three-core cable of AC power, red corresponds to the power of “L”, blue to “N”, and green or yellow to “G ”