



Order#: 20004

MPN: YGA05A22-T8-18W-850

Dimension:

Length	Width	Depth
47.72"	1.1"	1.1"


Specifications:

Wattage	18W	CRI	≥ 80
Base Type	G13	Voltage	120-277V
Dimmable	No	CCT	5000K
Lumen Output	2000 lm	Driver Efficiency	90%
Beam Angle	220°	PF	≥ 0.9
Chip	2835	Lifetime	50,000 hours
THD	<20%	Warranty	5 years

Features:

- Single-end Powered
- Frosted Glass Lens
- Built-in LED Current-control Driver
- Suitable for Wet and Damp Location
- L70 Life Time of 50,000 Hours



Light Distribution:

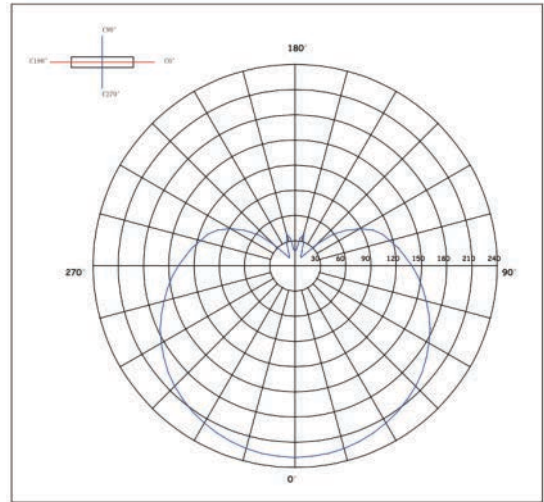



Installation Instructions:

1. Switch off power supply before installation. Remove diffuser (if applicable) and all fluorescent tube lamps from luminaire.


Identify which ballast and wiring setup is used in the luminaire as shown in Fig. 1 and Fig. 2.

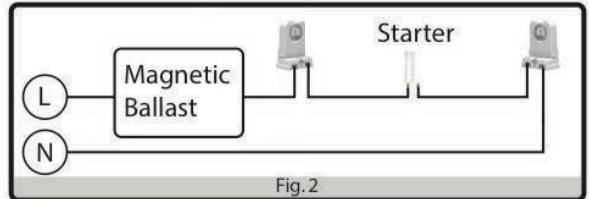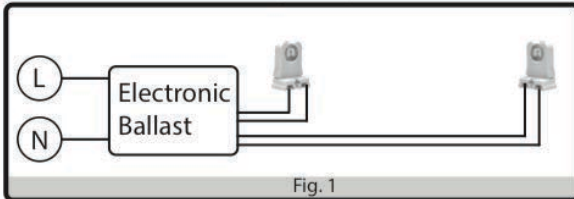


2. Cut all wires leading into and out of the ballast and starter (if applicable), as shown in Fig. 3 and Fig. 4.

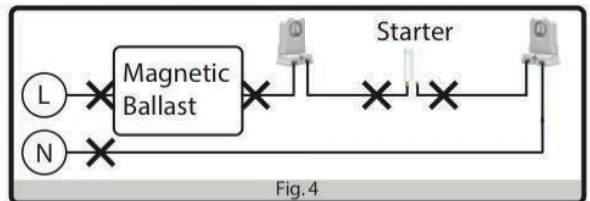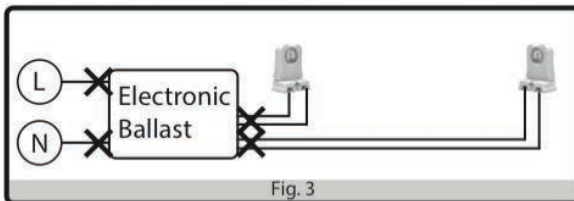

3. Connect the input supply lines to the lampholder as shown in Fig. 5.

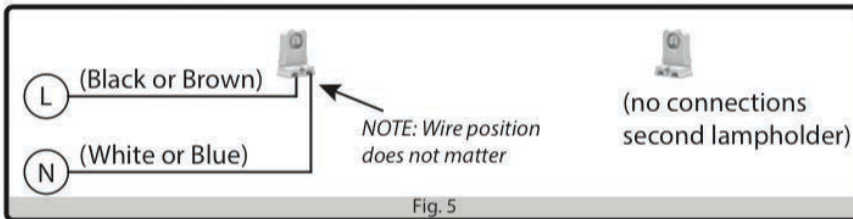

4. Apply the retrofit warning label on fixture in a location that will be readily visible during normal maintenance.

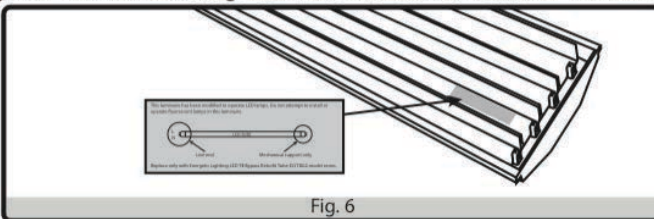

5. Locate the end of the LED T8 Tube where the "LIVE END" label is printed and ensure that this end of the tube is plugged into the LIVE lampholder socket as shown in Fig. 6. Turn the bulb in the direction such that the heat sink strip faces up into the fixture.

