

LED SHOEBOX FIXTURE

24W / 48W / 100W / 150W / 200W / 300W

INSTALL INSTRUCTIONS

SPECIFICATIONS

| ITEM# | DESCRIPTION | WATTS | COLOR | LUMENS | CRI | VOLT | HOURS |
|-------|---|-------|-------|--------|-----|--------|--------|
| 83505 | LED SHOE BOX FIXTURE 24W/50K/90-295V-4" SQ POLE/WALL MOUNT/BRONZE - SL® | 24 | 5000K | 2274 | 75 | 90-295 | 50,000 |
| 83509 | LED SHOE BOX FIXTURE 48W/50K/90-295V-4" SQ POLE/WALL MOUNT/BRONZE - SL® | 48 | 5000K | 5006 | 75 | 90-295 | 50,000 |
| 83512 | LED SHOE BOX FIXTURE 100W/50K/90-295V-4" SQ POLE/WALLMOUNT/BRONZE - SL® | 100 | 5000K | 9780 | 75 | 90-295 | 50,000 |
| 83517 | LED SHOE BOX FIXTURE 150W/50K/90-295V-4" SQ POLE/WALLMOUNT/BRONZE - SL® | 150 | 5000K | 14825 | 75 | 90-295 | 50,000 |
| 83520 | LED SHOE BOX FIXTURE 200W/50K/90-295V-4" SQ POLE/WALLMOUNT/BRONZE - SL® | 200 | 5000K | 20424 | 70 | 90-295 | 50,000 |
| 83522 | LED SHOE BOX FIXTURE 300W/50K/90-295V-4" SQ POLE/WALLMOUNT/BRONZE - SL® | 300 | 5000K | 29002 | 70 | 90-295 | 50,000 |

This fixture is suitable for wet locations, IP65.

Published lumens on LED products are approximate and may vary slightly.

WARNING

Installation, wiring or maintenance must be handled by professional technicians. Turn power off; to ensure reliable grounding and personal safety.

Do not cover any part of the fixture; this can cause overheating.

If wall mounting; the wall should be of sufficient strength to hold the fixture's weight.


Do not use in areas that are not properly ventilated from strong fumes.

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION



FIXED 4" SQUARE POLE MOUNT

1. Connect lamp power input line with main power cord.
2. Attach mounting bracket to pole, tighten the screws, the installation is completed.

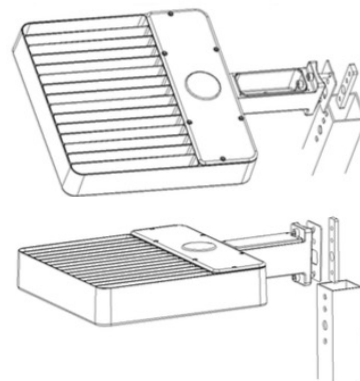

ADJUSTABLE SLIP FITTER (Item#: 83530)

1. Lamp pole diameter should be less than connection tube diameter; loosen screws on connection tube.
2. Remove the 4" Square Pole Mount
3. Connect lamp power input line with main power cord.
4. Put lamp pole into connection tube, then tighten the screws, the installation is completed.
5. Lighting angle can be adjusted as required.



83530

