

## Commercial Grade

### Features:

- Made of thermoplastic material
- Impact-resistant thermoplastic cover and body
- Shallow design for maximum wiring room
- Green grounding screw
- Captive mounting screws for fast installation where applicable
- Various colors available
- Two years warranty

### Material Characteristics:

- Environmental: Flammability UL94, V2 Rating
- Operating Temperatures: From -104°F (without impact) to 167°F maximum continuous


### Testing & Code Compliance:

- UL Listed
- ISO9001 Registered Manufacturing Facility




Side Wired Only, 2-Pole, 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR
Single Receptacle 15 A/125 V, 5-15R	61150-I	Ivory
	61150-W	White
	61150-A	Almond
	61150-BR	Brown
Single Receptacle 15A/250 V, 6-15R	61160-I	Ivory
	61160-W	White
Single Receptacle 20 A/125 V, 5-20R	61200-I	Ivory
	61200-W	White
	61200-A	Almond
	61200-BR	Brown
Single Receptacle 20 A/250 V, 6-20R	61210-I	Ivory
	61210-W	White

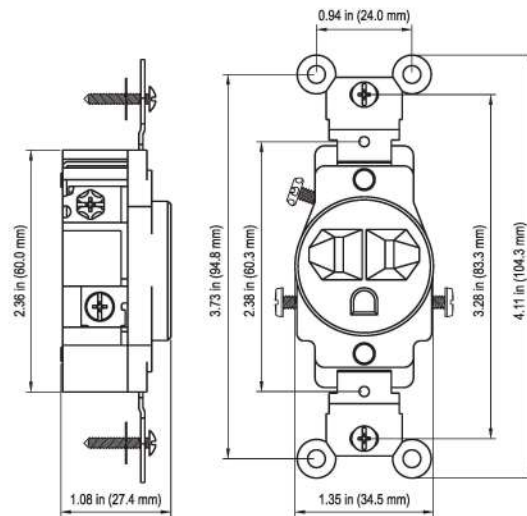

## Single Receptacle Diagram

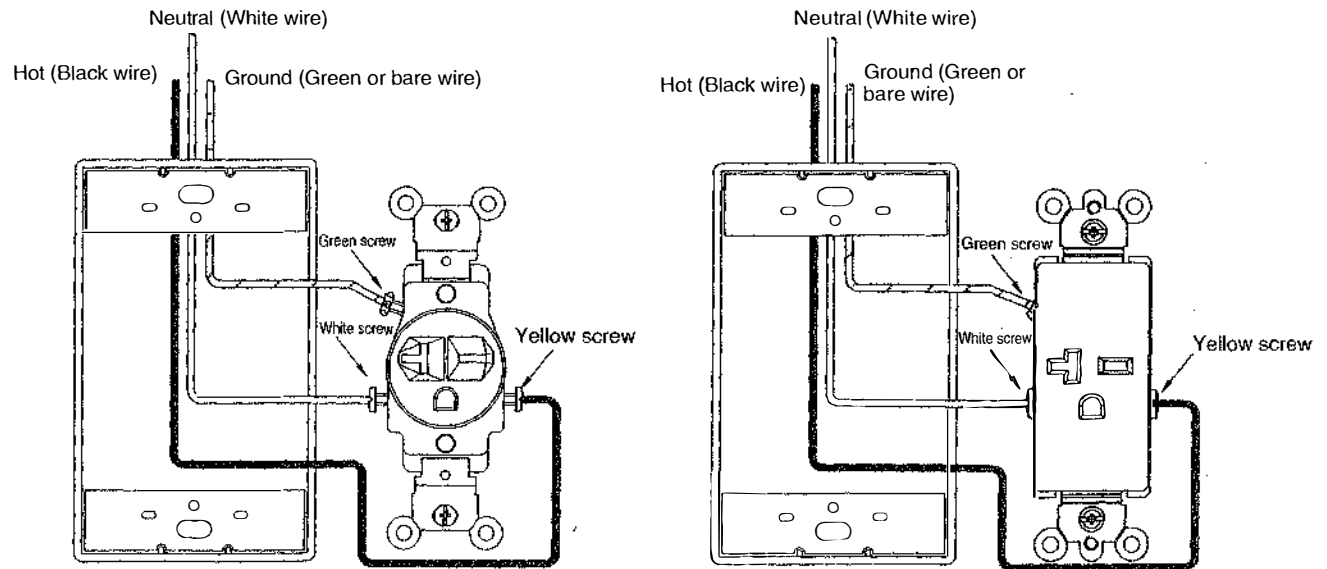

### Receptacle Instructions

**NOTICE:** For installation by a qualified person in accordance with national and local electrical codes.

**WARNING:** Risk of Electric Shock or Death. Disconnect power before installing.

**CAUTION:** USE COPPER CONDUCTORS ONLY; 20A, 14AWG to 12AWG.

- Remove insulation from conductors 5/8 inch.
- Side Wire: Wrap conductor securely around terminal screw. Tighten terminal screws securely, 9-12 pound•inch (1.0-1.4 N•m) of torque.

### French

**AVIS:** Doit être installé par un électricien qualifié conformément aux codes de personne nationaux et locaux.

**AVERTISSEMENT:** RISQUE DE CHOC ÉLECTRIQUE OU LA MORT. Débrancher le circuit avant de procéder au montage.

**ATTENTION:** EMPLOYER UNIQUEMENT DES CONDUCTEURS EN CUIVRE. 20A, du calibre 14AWG au calibre 12AWG.

- Enlever l'isolant des conducteurs 15.9mm.
- Câblage Latéral: Enrouler solidement le conducteur autour de la vis de borne. Reserrer les vis de bornes. Couple de serrage: 1,0-1,4 N•m.

### Spanish

**AVISO:** Para ser instalado por un electricista calificado, de acuerdo con los códigos persona nacionales y locales.

**ADVERTENCIA:** RIESGO DE CHOQUE ELÉCTRICO O MUERTE. Desconectar la corriente antes de la instalación.

**CUIDADO:** UTILIZAR SOLAMENTE CONDUCTORES DE COBRE. 20A, 14AWG a 12AWG.

- Quitar el aislamiento de los conductores 15.9mm.
- Cableado Lateral: Enrollar firmemente el conductor alrededor del tornillo del borne. Ajustar los tornillos de los bornes con un par de 1,0-1,4 N•m.