

COMPACT FLUORESCENT LAMPS - PL

Energy Efficient
Average Life 10,000 Hours


Watts	Item code	Description	Base	Luminous Flux		Dimensions		Color Temp (K)	Case Qty.
				Initial (lm)	Mean (lm)	MOL (in)	Avg. Life (Hours)		
Triple Tube 4-Pin GX24q-1 Base-for Electronic Ballasts-Dimmable									
*13	F01323414201	PL13W/3U/4P/827	GX24q-1	900	810	4.45	10000	2700	50
*13	F01323414301	PL13W/3U/4P/835	GX24q-1	900	810	4.45	10000	3500	50
*13	F01323414401	PL13W/3U/4P/841	GX24q-1	900	810	4.45	10000	4100	50
Triple Tube 4-Pin GX24q-2 Base-for Electronic Ballasts-Dimmable									
18	F01823415201	PL18W/3U/4P/827	GX24q-2	1200	1080	4.65	10000	2700	50
*18	F01823415001	PL18W/3U/4P/830	GX24q-2	1200	1080	4.65	10000	3000	50
18	F01823415301	PL18W/3U/4P/835	GX24q-2	1200	1080	4.65	10000	3500	50
18	F01823415401	PL18W/3U/4P/841	GX24q-2	1200	1080	4.65	10000	4100	50
*18	F01823415601	PL18W/3U/4P/865	GX24q-2	1140	1025	4.65	10000	6500	50
Triple Tube 4-Pin GX24q-3 Base-for Electronic Ballasts-Dimmable									
26	F02623416201	PL26W/3U/4P/827	GX24q-3	1800	1620	5.28	10000	2700	50
*26	F02623416001	PL26W/3U/4P/830	GX24q-3	1800	1620	5.28	10000	3000	50
26	F02623416301	PL26W/3U/4P/835	GX24q-3	1800	1620	5.28	10000	3500	50
26	F02623416401	PL26W/3U/4P/841	GX24q-3	1800	1620	5.28	10000	4100	50
*26	F02623416601	PL26W/3U/4P/865	GX24q-3	1710	1540	5.28	10000	6500	50
32	F03223416201	PL32W/3U/4P/827	GX24q-3	2400	2160	5.87	10000	2700	50
*32	F03223416001	PL32W/3U/4P/830	GX24q-3	2400	2160	5.87	10000	3000	50
32	F03223416301	PL32W/3U/4P/835	GX24q-3	2400	2160	5.87	10000	3500	50
32	F03223416401	PL32W/3U/4P/841	GX24q-3	2400	2160	5.87	10000	4100	50
*32	F03223416601	PL32W/3U/4P/865	GX24q-3	2280	2052	5.87	10000	6500	50
Triple Tube 4-Pin GX24q-4 Base-for Electronic Ballasts-Dimmable									
42	F04223417201	PL42W/3U/4P/827	GX24q-4	3200	2880	6.77	10000	2700	50
*42	F04223417001	PL42W/3U/4P/830	GX24q-4	3200	2880	6.77	10000	3000	50
42	F04223417301	PL42W/3U/4P/835	GX24q-4	3200	2880	6.77	10000	3500	50
42	F04223417401	PL42W/3U/4P/841	GX24q-4	3200	2880	6.77	10000	4100	50
*42	F04223417601	PL42W/3U/4P/865	GX24q-4	3040	2740	6.77	10000	6500	50
57	F05723417201	PL57W/3U/4P/827	GX24q-4	4300	3440	7.76	10000	2700	50
*57	F05723417001	PL57W/3U/4P/830	GX24q-4	4300	3440	7.76	10000	3000	50
57	F05723417301	PL57W/3U/4P/835	GX24q-4	4300	3440	7.76	10000	3500	50
57	F05723417401	PL57W/3U/4P/841	GX24q-4	4300	3440	7.76	10000	4100	50
*57	F05723417601	PL57W/3U/4P/865	GX24q-4	4300	3440	7.76	10000	6500	50

* Items only available for special orders

All measurements are shown in inches unless noted

Manage in Accordance with Disposal Laws

See: www.htr-group.com or 1-888-537-4874

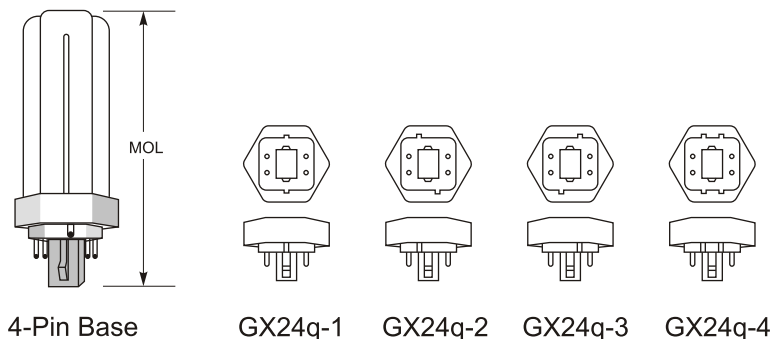

4-Pin Base

GX24q-1

GX24q-2

GX24q-3

GX24q-4