

BALLAST COMPATIBLE PL LED INSTALLATION INSTRUCTIONS

These instructions apply to the PL LED models listed in the table below. Prior to installation, please read the entire installation instructions.

DANGER - Risk of Electric shock. Disconnect power to the luminaire at the source before installation.
WARNING - Risk of Fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. Installation should be performed by a qualified electrician in accordance with the National Electrical Code and relevant local code.

WARNING - Risk of fire or electrical shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating does not exceed the input rating of the luminaire.

WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

CAUTION - If the lamp or luminaire exhibits undesirable operation, immediately turn off the power, remove the lamp and contact the manufacturer.

This device is not intended for use with Emergency Exits

Suitable for use in damp locations. Do not use where exposed to water.
 Suitable for use with compatible electronic ballast. Please see list below.
 Suitable for use in open, semi-enclosed or recessed fixtures.



INSTALLATION REQUIREMENTS

Model	Voltage	Ballast Compatibility	Base Type	Environment	Acceptable Fixtures	Minimum Compartment Dims.	
LED-7330-XXK-G2	N/A	Compatible Electronic Ballast. See list below.	G24q and GX24q	Suitable for dry or damp locations	Indoor - Open Fixture Indoor - Recessed	3.5"	7.0"
LED-7334-XXK-G2							

CONTENTS

1 pc LED Retrofit Lamp

1 pc Re-Lamping Label


1 pc Installation Instructions

INSTALLATION INSTRUCTIONS

- 1.) Turn off power to the luminaire at switch and circuit breaker
- 2.) Allow luminaire to cool and remove lamps
- 3.) Ensure that the luminaire, ballast and electrical input meet the requirements listed above.
- 4.) Please confirm that it is a compatible ballast. The compatible ballast list only lists ballasts that were tested. Other ballasts may also work.
- 5.) Insert the lamp into the lamp holder.
- 6.) Apply the silver adhesive label to the inside of the luminaire where it will be visible during re-lamping.
- 7.) Turn on the power to the fixture and verify proper operation.


WIRING DIAGRAM AND BALLAST COMPATIBILITY LIST

WIRING DIAGRAM - Single Lamp PNP

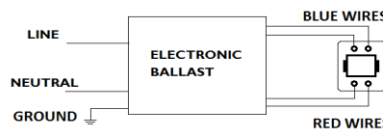

NOTE: In Single lamp installation, the yellow wires are not used. Please remove or cap the wires if applicable.

WIRING DIAGRAM - 2 Lamp PNP

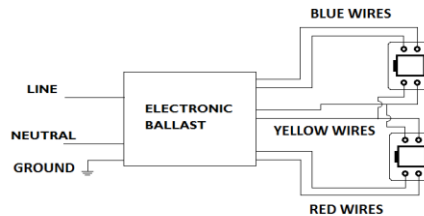

Compatible Ballast List

Philips Advance ICF-2S18-HA-LD
Philips Advance ICF-2S26-H1-LD
Philips Advance ICF-2S42-M2-LD
GE GEC218-MVPS-3W
GE GEC226-MVPS-3W
UNIVERSAL / TRIAD C213UNVME
UNIVERSAL / TRIAD C218UNVSE
UNIVERSAL / TRIAD C2642UNVME
OSRAM 2*26CF/UNV DM
HATCH HC218PS/UV/WJ

COMPATIBLE FOR 2-LAMP ONLY

SYLVANIA 2*26CF/UNV DM

NOT COMPATIBLE:

FULHAM WH2-277-L
HATCH HC213PS/UV/D
KEYSTONE KTEB-226-UV-PS-DW
HATCH HC218PS/UV/D