



## FB32T8/6 TL730

### ALTO

Product family description  
Low mercury lamps

#### Features/Benefits

- Full range of 6" Leg Spacing F32T8 Lamps
- Range of color temperatures (3000K to 5000K)
- Outstanding Lumen Performance
- 95% Lumen Maintenance
- 85 CRI for TL830, 835, and 841 lamps.
- 84 CRI for TL850 lamps.
- 75 CRI for TL730, 735, 741 and 750 lamps
- Better for the environment
- Low mercury
- Energy efficient
- Philips T8 U-Bent Warranty Period: 24 Months

#### Applications

- Ideal for commercial applications with 2 x 2 fixtures.


#### Notes

- Rated average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently. (202)
- Approximate Initial Lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions. (203)
- For expected lamp lumen output, commercial ballast manufacturers can advise the appropriate Ballast Factor for each of their ballasts when they are informed of the designated lamp. The Ballast Factor is a multiplier applied to the designated lamp lumen output. (204)
- Design Lumens are the approximate lamp lumen output at 40% of the lamp's Rated Average Life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions. (208)
- Nominal length measured from face of base to maximum distant outside point of U. Measurement does not include base pins. Leg spacing center to center approximately 6 inches, for /6 and 3 5/8 inches for /3 lamps.

Product data	
Product Number	378927
Full product name	FB32T8/6 TL730 ALTO
Ordering Code	FB32T8/TL730/6/ALTO
Pack type	1 Lamp
Pieces per Sku	1
Skus/Case	20
Pack UPC	046677378929
EAN2US	
Case Bar Code	50046677378924
Successor Product number	
Base	Medium Bi- Pin [Medium Bi- Pin Fluorescent]
Base Information	Green Base
Bulb	T8- 6U [U- bent T 8/8 inch with 6" spacing]
Packing Type	1LP [1 Lamp]
Packing Configuration	20
Type	FB32T8/6
Feature	ALTO®
Rated Avg. Life [3 hr Start]	20000 hr
Rated Avg Life [12 Hr Start]	24000 hr
Ordering Code	FB32T8/TL730/6/ALTO
Pack UPC	046677378929
Case Bar Code	50046677378924
Energy Saving	Energy Saving
Watts	32W
Mercury (Hg) Content	3.0 mg
Picogram per Lumen Hour	63 p/LuHr
Color Code	TL730 [CCT of 3000K]
Color Rendering Index	75 Ra8
Color Designation	TL730
Color Temperature	3000 K
Initial Lumens	2650 Lm
Design Mean Lumens	2370 Lm
Nominal Length [inch]	22.44
Product Number	378927




F- T8- URS Med Bipin/GB



Base Medium Bi- Pin



Energy Saving Energy Saving

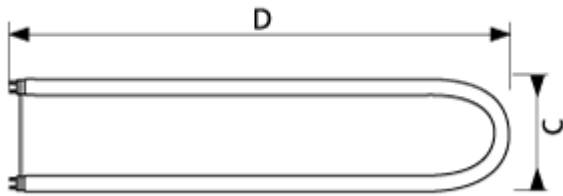

F- T8- URS Med Bipin

