

LED MEDIUM WALLPACK

Installation Guide



WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION


- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -30°C to 45°C and to be horizontally mounted with the LEDs facing down.
- Wall mount only.

1. Unpacking


Thoroughly inspect the fixture for freight damage. Freight damage should be reported to the delivery carrier.

2. Installation


1. Open the front housing assembly and Remove the front housing assembly.

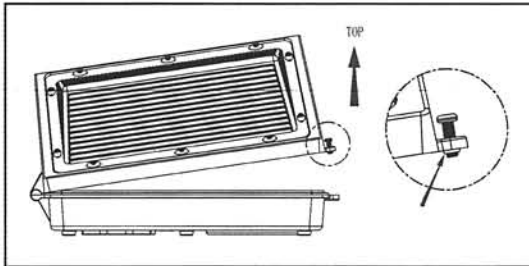

2. Wiring can be performed using a recessed junction box or a surface conduit. The fixture back plate has a template that matches two standard junction box sizes. Conduit is connected using the 1/2" NPS tapped holes ("A").

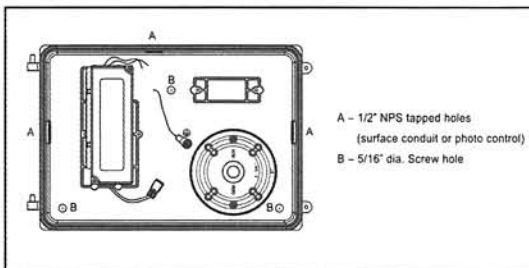


3. Prepare the back-plate for mounting by drilling out the two corner and the center 5/16" diameter holes ("B").

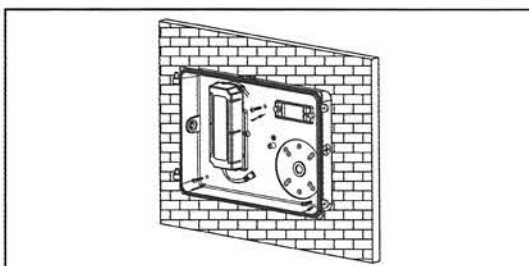

4. If wiring is performed using a recessed junction box then drill out the appropriate junction box holes.


5. Line up the back plate in the desired location and mount securely. Use the supplied gaskets for a weather tight seal between back plate and junction box.

6. Attach the driver input wires to the color matched supply wires.

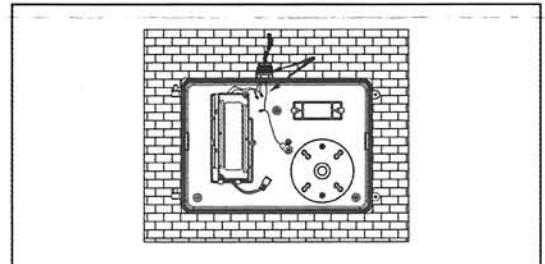

7. Place the front housing assembly on the hinge pins of the back plate.

8. Plug the male connector of the led board into the female connector of driver.

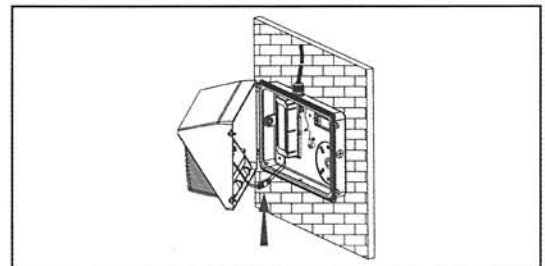

9. Fasten the front housing assembly to the back plate.

