



Low-Profile for Space-Limited Fixtures
Automatic Code Compliant Testing
For Standard and HO T5 and T8 Lamps
End-of-Lamp-Life Compatible

Project: _____
Location: _____
Cat.No: _____
Type: _____
Qty: _____
Notes: _____

Product order number:
LP600STUCR

12NC number:
913702456301

Specifications

UL Listed for US and Canada

Listed to UL 924 and tested to CSA 22.2 No. 141
Factory or Field Installation (Indoor and Damp)

Illumination Time

90 Minutes

Initial Light Output

600-1325 Lumens @ 25°C

Universal Input Voltage

120-277 VAC, 50 or 60 Hz

AC Input Current

55 mA

AC Input Power Rating

5.0 Watts

Test Switch / Charging Indicator Light

Two-Wire Illuminated Test Switch
(2W-ITS is a Class 2 device)

Battery

High-Temperature, Maintenance-Free
Nickel-Cadmium Battery
7 to 10-Year Life Expectancy

Recharge Time

24 Hours

Temperature Rating (Ambient)

0-50°C (32-122°F)

Dimensions

21.5" x 1.18" x 1.18" (546.1 mm x 30 mm x 30 mm)
Mounting Center 22.1" (561 mm)

Weight

3.3 lbs (1.5 kg)

Warranty



5 Years (NOT pro-rata)

Benefits:

- Self-testing for automatic code-compliance
- Emergency mode lumen output up to 1325 lumens
- End-of-Lamp-Life Compatible
- Two-wire illuminated test switch - Class 2 Device
- Compatible with TLED lamps (see Table 1)

Dimensions

21.5" x 1.18" x 1.18"
Mounting Center - 21.1"

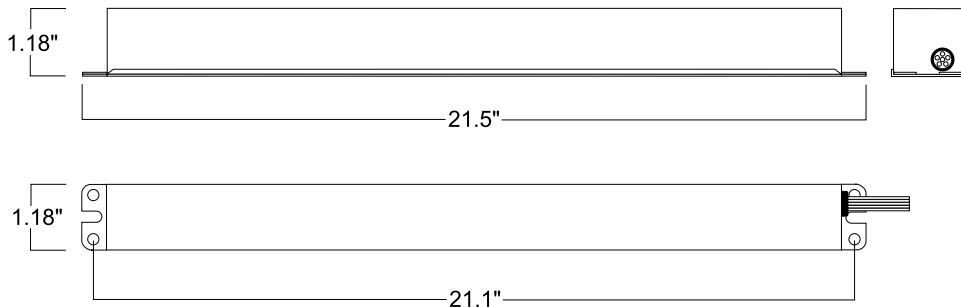

An illuminated test switch/charging indicator light is provided.

LP600STU

Fluorescent Emergency Ballast, Low-Profile for Space-Limited Fixtures

Application

The LP600STU low-profile emergency ballast works in conjunction with a low-profile or standard-size AC ballast to convert T5 and T8 fluorescent fixtures into unobtrusive emergency lighting. The emergency ballast consists of a battery, charger and electronic circuitry in one compact case. The LP600STU can be used with one standard or high-output T5 or T8 lamp or one 4-pin long compact fluorescent lamp (see Table 1). Also operates Philips LED T8 Models: 9290002840, 9290002841, 9290002842, 9290002862, 9290008964, 9290008965. It is also compatible with most one, two, three and four-lamp electronic, standard, energy-saving and dimming AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. The LP600STU is suitable for indoor and damp locations and for sealed & gasketed fixtures, including fixtures rated for wet locations. It is not suitable for air handling heated air outlets or wet or hazardous locations. For information about specific lamp and ballast compatibility, please contact Technical Support. Recommended applications include: emergency lighting for pendant, cove, recessed indirect/direct, surface-mount and architectural lighting commonly used in office, hospitality, healthcare, retail and educational facilities, as well as for international line voltages, drilling rigs where generators are the primary source of power and other applications requiring higher tolerance of line voltage variation or harmonic distortion.

Operation

During normal operation, the LP600STU constantly monitors battery voltage. When AC power fails, the LP600STU immediately switches to the emergency mode, operating one lamp at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency ballast automatically

returns to the charging mode and, using a patented circuit, delays AC ballast operation for approximately three seconds to prevent false tripping of the AC ballast end-of-lamp-life shutdown circuits. During automated testing, the LP600STU simulates an AC power failure, causing the emergency ballast to switch to emergency mode and conduct a discharge test to monitor battery voltage and discharge current. If the LP600STU detects a problem, the status indicator light flashes. When testing is complete, the LP600STU returns to the charging mode. The LP600STU automatically tests emergency lighting for 30 seconds every 30 days and 90 minutes once a year.

Installation

The LP600STU does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The LP600STU may be installed inside or on top of the fixture. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C.

Emergency Illumination

Depending on the wattage and type of lamp selected, the LP600STU produces 600 to 1325 lumens initial emergency light output. During emergency operation, one lamp is illuminated, even if installed with a multi-lamp AC ballast.

Specification

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with a Bodine LP600STU low-profile self-testing/self-diagnostic fluorescent emergency ballast. Electronic circuitry shall be self-testing in design and automatically test

emergency lighting for a minimum of 30 seconds every 30 days and 90 minutes once a year. An embedded microcontroller will continuously monitor the battery voltage. The emergency ballast, using a patented circuit, shall delay AC ballast operation for approximately three seconds to prevent false tripping of AC ballast end-of-lamp-life shutdown circuits. The LP600STU shall consist of a high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one 21.5" x 1.18" x 1.18" galvanized steel case. A solid-state charging indicator light to monitor the charger and battery, a 2W-ITS and installation hardware shall be provided. The emergency ballast shall be capable of operating one _____ fluorescent lamp at _____ lumens (see Table 2) initial emergency light output in the emergency mode for a minimum of 90 minutes. It shall be suitable for indoor and damp locations and for sealed & gasketed fixtures, including fixtures rated for wet locations. The LP600STU shall have universal input voltage (120 through 277 Vac, 50 or 60Hz), 5 Watts of input power and an 21.0 Watt-hour battery capacity and shall exceed emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation inside or on top of the fixture, in both the US and Canada.

Warranty

Model LP600STU is warranted for five (5) full years from date of purchase. Please see detailed warranty information on our website.

Table 1 Lamp Compatibility

LAMP DIAMETER (T8, T9, T10, T12)	BASE	WATTAGE (Length)	NO. of LAMPS (EMERGENCY)
T5/HO	Miniature Bipin	14-54 W (2'-4')	1
T5	Miniature Bipin	14-28 W (2'-4')	1
T8/HO	Bipin	44 W (4')	1
	Recessed DC	44-55 W (4'-5')	1
T8	Bipin	17-40 W (2'-5')	1
LED T8 InstantFit	Bipin	14.5W (4')	1
Long Compact	4-pin (2G11)	36-55 W	1

Table 2 Initial Lumen Output

LAMP	LUMENS	LAMP	LUMENS
	1 Lamp		1 Lamp
FP54, F54T5/HO	250	F40T8 (5')	1325
FP39, F39T5/HO	1125	F40T8/HO (4', 44 W)	1100
FP24, F24T5/HO	725	F60T8/HO (5', 55 W)	1275
FP28, F28T5	1250	PL-L 50W, F50BX/RS, FT55DL	1050
FP21, F21T5	1025	PL-L 40W/RS, F40/30BX, FT40DL/RS	925
FP14, F14T5	750		
F17T8	650	PL-L 36W, F39/36BX, FT36DL	900
F25T8	750		
F32T8, (4')	1100	Philips LED T8 InstantFit	575



© 2024 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 800-500-0050

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.