

Package Contents

	PART	DESCRIPTION	QUANTITY
	A	4/6/8/10 INCH 5CCT LED Recessed Commercial Baffle Downlight	1
	B	Hole cut out card	1
	C	Wire nuts	5
DIMMING INFORMATION This recessed downlight is suitable for use in dimming circuits. For 100% to 0% light control, use with any LED compatible dimmer.			
	LUTRON	RMJS-BT-DV-B, Diva DVSTV, MS-Z101-WH, DVSTV-WH	LEGRAND RH4FBL3PW

Please read all the instructions before attempting installation

WARNING: To reduce risk of fire, electric shock, or injury to persons.

These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with these instructions, and current electrical codes. Disconnect power to the unit prior to installation.

- Read all instructions before beginning. If you have any doubts about how to install this lighting fixture, or if the fixture fails to operate completely, consult a qualified electrician to ensure correct brand circuit conductor.
- Always be sure the power supply is turned off at fuse box or circuit breaker before installing, cleaning, or servicing the fixture.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Do not make or alter any open holes in wiring enclosure or in any electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. There are no serviceable parts inside the fixture.
- Suitable for Wet Locations.
- Type IC Rated. Suitable for contact with insulation.
- Do not alter driver junction box in any manner.
- Fixture may become hot during operation. Always ensure power is off and the fixture has cooled down before performing any adjustments.

- Do not install any luminaire near a heat source.
- Do not exceed the nominal supply voltage or amperage ratings.
- For safest operation, read and become familiar with complete installation instructions prior to use. Pay close attention to this manual and stay within its guidelines when using this product.

CAUTION

- All parts must be used as indicated in this manual. Do not substitute any parts, leave parts out, or use parts that are worn out or broken. Failure to obey this instruction could invalidate the ETL certification.
- LEDs emit bright light, avoid looking directly at the light source.

BEFORE INSTALLATION

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit power cord or housing to contact any surface having a sharp edge. Do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- This fixture requires 120-277V power input. The installer must confirm the input power at the source prior to installation

Installation Instructions

1. Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter, see Fig1.
2. Choose desired CCT & Wattage by simply switching the switch, see Fig2.
3. At each the carabiner safety clip to the existing fixture housing, see Fig3.
4. Connect AC and dimming supply cables inside the hardwire Junction Box(not included) by using 5 wire nuts in the following manner: black to black, white to white, pink to pink or grey, purple to purple, and green-earth to ground wire, see Fig4.
5. Push downlight spring loaded clips upwards and insert the base into the mounting hole. Release the clips and the fixture will grip flush with the ceiling/drywall, see Fig5.
6. Turn on the power to confirm the fixture is working properly, see Fig6.

<p>Fig1</p> <p>HOLE SIZE 4 inch: 4.33" (110mm) 6 inch: 6.30" (160mm) 8 inch: 8.07" (205mm) 10 inch: 8.98" (228mm)</p>	<p>Fig2</p> <p>SELECTABLE WATTAGE 4 inch: 6W-9W-12W 6 inch: 12W-17W-22W 8 inch: 17W-24W-30W 32W-42W-52W 12 inch: 22W-30W-38W</p> <p>SELECTABLE CCT <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K</p>	<p>Fig3</p>
--	---	-------------

Fig4

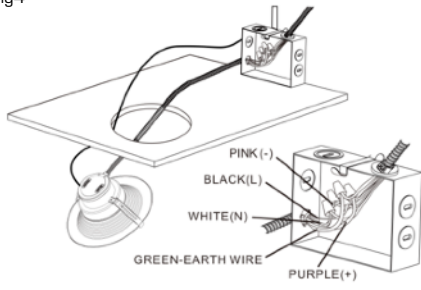


Fig5

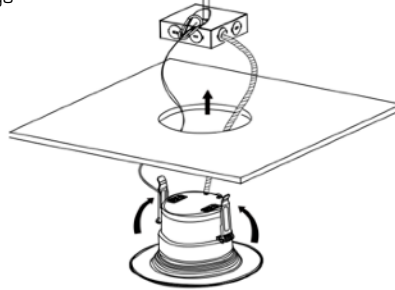


Fig6

