




Accessory | EM Driver | Internal | 15W | 170Vdc Output

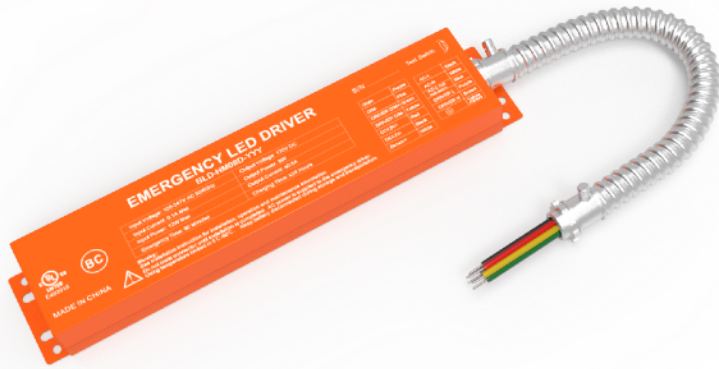

Model No.	EM15-HMB/170DC
Product ID	BLD-HM15D-YYY
Rated Input Voltage	100-347Vac, 50/60Hz
Rated Input Current	100mA Max
Rated Input Power	8.0W Max
Power Factor	>0.50
Charge Time	24hours
Emergency Standby	90min
Charge Current	0-250mA
Battery Information	High-Temperature, Maintenance-Free Ni-MH battery
Output Voltage Range	170Vdc
Output Power	15W Max
Output Current	AC 4A Max
Max. Application	150W or 4A
Ambient Operating	32°F — 122°F
Storage Temperature	158°F Max
Charge Discharge Cycle	500 Full Cycles
Approvals	UL Listed, Class 2, Damp & Dry Locations
Warranty	5-Years
Protections	- Input over current protection - Output over voltage protection - Output under current protection - Output short circuit protection

TEST SWITCH & LED INDICATOR

- For connecting to the emergency lighting unit
- The test switch for checking the device function
- LED indicates that charging current is flowing into the battery

COMPATIBLE SERIES

lampar[®]ARCH

- Recommended for Field-Install
 - Indoor | lampar[®]ARCH / LLSN-Vanguard


plano[®]ARCH

- Recommended for Field-Install
 - Indoor | plano[®]ARCH / LBLP-collections
 - Indoor | plano[®]ARCH / LPNR-collections
 - Indoor | plano[®]ARCH / LPVT-select[®]ARCH
 - Indoor | plano[®]ARCH / LCDL-Solstice

tubul[®]ARCH

- Recommended for Field-Install
 - Lamps | tubul[®]ARCH | UL-B Tubes

DIMENSIONS

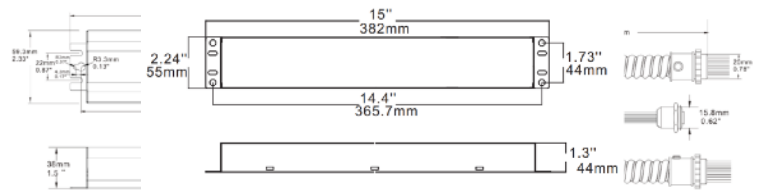




INSTALLATION GUIDE

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- DO NOT USE OUTDOORS.
- DO NOT MOUNT NEAR GAS OR ELECTRONIC HEATERS.
- EQUIPMENT SHOULD BE MOUNTED IN LOCATIONS AND AT HEIGHTS WHERE IT WILL NOT BE SUBJECTED TO TAMPERING BY UNAUTHORIZED PERSONNEL.
- THE USE OF ACCESSORY EQUIPMENT NOT RECOMMENDED BY THE MANUFACTURER MAY CAUSE AN UNSAFE CONDITION.
- DO NOT USE THIS EQUIPMENT FOR OTHER THAN ITS INTENDED USE.
- Use with grounded, UL Listed, damp location rated fixtures and case should be grounding.
- The equipment is intended for ordinary locations and for permanent installation into one or more Listed emergency luminaires
- Please install this product properly by the licensed electrician.
- Surface mounting and suspending mounting are available.
- It is only used for <300W lighting fixtures.
- Please check and confirm all the data and usage surrounding before installation.
- Damp location installation is OK.
- This item could be used in the sealed fixtures or installed open area of the fixtures.
- Please keep it away from the flammable materials with a place of good heat dissipation.
- Please charge the battery consistently for >24 hours for the first time usage so as to activate the whole battery cells of discharging/charging duration.

WIRING DIAGRAM W/ EMERGENCY DRIVER

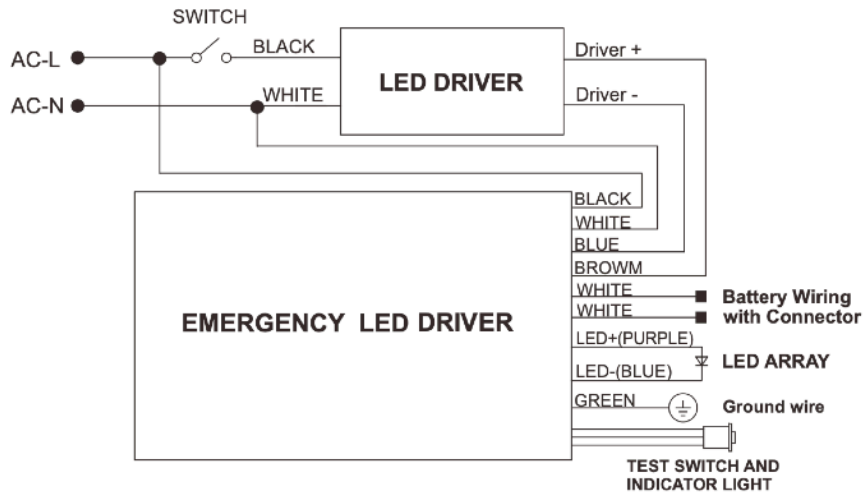

ARCHIPELAGO LIGHTING

Archipelago Lighting, Inc. is a leading prime manufacturer of commercial and residential lighting products in USA and China. We are a team of passionate lighting professionals whose goal is to improve life through disruptive LED lighting products. We manufacturer a wide variety of products to support the growing adoption of energy efficient LED.

