



PRO-STAR™ MR-16

Aluminized Reflector

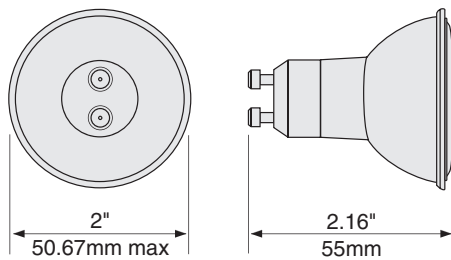

GU10

Dichroic Reflector

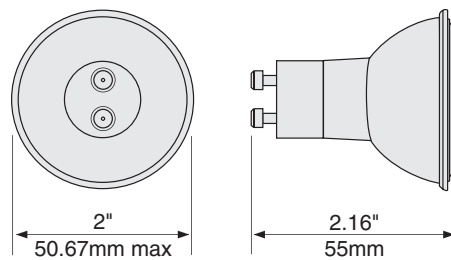

GZ10

ø[ft]	H[ft]	E[fc]
1.44	3.3	130
2.89	6.6	33
4.33	9.8	14
5.77	13.1	8
25° PRO-STAR™ 50W		

ø[ft]	H[ft]	E[fc]
3.05	3.3	60
6.10	6.6	15
9.18	9.8	7
12.23	13.1	4
50° PRO-STAR™ 50W		

Watts (W)	USHIO Ordering Code	USHIO Lamp Code	Voltage (V)	Color Temp (K)	Beam Angle	Beam Spread	Luminous Intensity (cd)	Avg Life (h)	Base Type
50	1003301	50MR16/GU10/NFL25	120	2750	25°	Narrow Flood	1400	2500	GU10
50	1003303	50MR16/GU10/WFL50	120	2750	50°	Wide Flood	650	2500	GU10
50	1003305	50MR16/GZ10/NFL25	120	2750	25°	Narrow Flood	1400	2500	GZ10
50	1003307	50MR16/GZ10/WFL50	120	2750	50°	Wide Flood	650	2500	GZ10

Distributed by: