



COLOR/WATTAGE SELECTABLE LED LINEAR HIGH BAY

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- Read the installation instructions carefully and check to ensure all accessories are present. Once confirmed, install the fixture according to the installation steps.
- Check fixture for damage before installation. If damaged, contact the manufacturer immediately.

CAUTION

- Do not use an electric generator to test this fixture.
- If wiring smokes or sparks, turn off the power immediately and contact a licensed electrician.
- Use listed strain relief bushing when connecting the supply cord to the outlet box.

Installation Instructions

CCT and Wattage Adjustment

1. Remove the 3/4 plug on the back of the fixture with a screwdriver. (Figure 1)
2. Slide the CCT and Wattage switches to the desired settings, then reinstall the plug and tighten it fully. (Figure 2)

Default Settings:

- PLT-13532 – 150W, 5000K
- PLT-13533 – 200W, 5000K




Figure 1

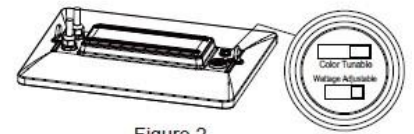


Figure 2

Suspending with Chain or Cable

1. Attach the S-hook of the chain or safety cable to the ring of the fixture. (Figure 3)
2. Attach the other end of the chain or cable to the ceiling hook or cross bar.
3. Once attached, choose a suitable waterproof junction box and make connections according to local standards and codes.

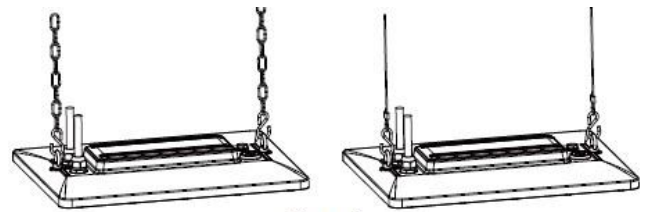


Figure 3



COLOR/WATTAGE SELECTABLE LED LINEAR HIGH BAY

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Motion Sensor & PIR Sensor

1. Remove the 1/2 plug on the front of the fixture using a screwdriver. (Figure 11)



Figure 11

2. Twist-and-lock the sensor to the base to connect it. Use a remote control to adjust the sensor settings as needed.

Compatible Skus:

- Motion Sensor – PLT-12844
- PIR Sensor – PLT-13121
- Remote Control – PLT-12291

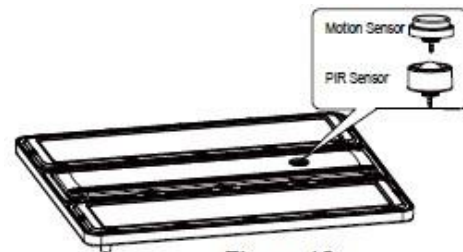


Figure 12


Wiring Diagram

L: Black
N: White
⊕ : Green/Yellow
DIM +
DIM -

Check the fixture label for the DIM + and DIM – wire colors.

If you wish to dim this fixture, choose the dimming method most suitable to your needs.

NOTE: This fixture cannot be paired with a dimmer if the motion sensor is being used.

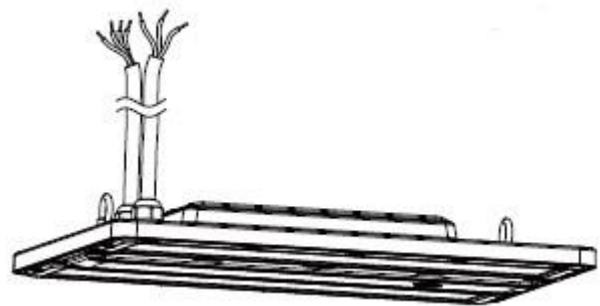

Compatible Dimmers

This fixture has 0-10V dimming. The recommended dimmers are:

Brand	Model
LUTRON	NTSTV-DV
LEVITON	DS710-10Z / IP710
LEGRAND	RH4FBL3PW



COLOR/WATTAGE SELECTABLE LED LINEAR HIGH BAY

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.