



PATIO STRINGERS W/ LED BULBS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Do not overload the maximum wattage capacity in any run. The maximum rating for this product is 960 watts.
- Do not overload the maximum wattage rating for any socket. The maximum rating for each socket is 25 watts.
- Use only type S14 Edison Style LED lamps, 1 Watt maximum (PLT-13596).
- Before using or reusing, inspect the product carefully. Discard any products that have cut, damaged, or frayed wire insulation or cords, cracks in the lamp holders or enclosures, loose connections, or exposed copper wire.


CAUTION

- This product is not intended for permanent installation or use. It is for residential year-round outdoor decorative use. It is not intended for commercial use.
- Do not install the product near water containers.
- Do not mount or place near gas or electric heaters, fireplaces, candles, or other similar sources of heat.

NOTICE


- Canada IC Notice: This Class B digital apparatus complies with Canadian ICES-5(B) /NMB-5(B) standard.

Contents

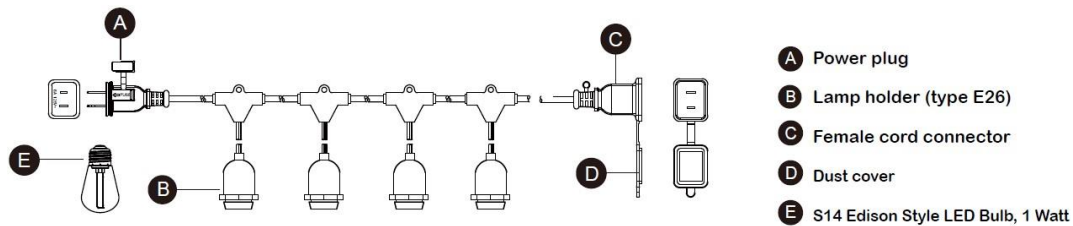

Installation Instructions

- Determine the installation location and lay out the stringer before assembly.
- Screw in the provided bulbs (E) clockwise. Do not overtighten.
- Attach the patio stringer directly to the structural support. Use screw hooks or zip ties if needed (not provided). The patio stringer should be installed so that the bulbs (E) are facing downwards.
- Close the dust cover (D).
- Connect the plug (A) to a suitable outlet.

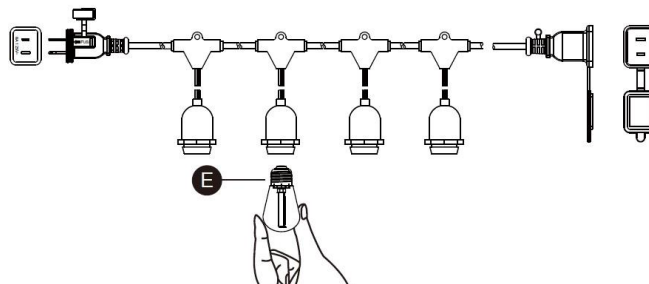



PATIO STRINGERS W/ LED BULBS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Connecting in Series

- To attach additional string lights, insert the plug of a new set into the female cord connector (C). Cover open end with corresponding dust cover.
- The maximum number of connected strings should not exceed the maximum run rating for this product of 960 watts. The stringer cannot be cut in order to reach the maximum wattage run.

Bulb Replacement

- Grasp plug and remove from the receptacle or other outlet device. Do not unplug by pulling on the cord.
- Unscrew lamp counterclockwise.
- Screw in a new lamp clockwise. Replace lamp with only 120V S14 Edison Style LED Bulbs 1 Watt type lamp (PLT-13596).
- During cleaning, do not immerse the electrical parts of the product in water or other liquids. Never hold the stringer under running water.

Cleaning

- To clean, wipe with soft, slightly moist cloth.
- Never use corrosive detergents, wire brushes, abrasive scourers, metal or sharp utensils to clean the product.

Maintenance

- When the product is placed on a live tree, the tree should be well maintained and fresh. Do not place on live trees in which the needles are brown or break off easily. Keep the tree holder filled with water.
- If the product is placed on a tree, the tree should be well secured and stable.
- When storing the product, carefully remove the product from wherever it is placed including: trees, branches, or bushes to avoid any undue strain or stress on the product conductors, connections, and wires.
- When not in use, store neatly in a cool, dry location protected from sunlight.

Specifications

	PLT-13556	PLT-13557	PLT-13558
Rated Voltage	120V~60HZ	120V~60HZ	120V~60HZ
Rated Watt	1W*12	1W*24	1W*48
Socket Type	E26	E26	E26
Lamp Type	S14 Edison Style 1W LED (×12)	S14 Edison Style 1W LED (×24)	S14 Edison Style 1W LED (×48)
Cable Type	SJTW, 18AWG	SJTW, 18AWG	SJTW, 18AWG
Cable Length	24FT/7.3m	48FT/14.6m	100FT/30.48m

FCC Warning

- This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



PATIO STRINGERS W/ LED BULBS

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.