

ISB SOLA BASIC



REV. "A"

FLUORESCENT BALLAST SPECIFICATIONS

DESCRIPTION

CATALOG ERSF-134-TP	TYPE Normal Power Factor	STARTING METHOD Rapid Start	NUMBER OF LAMPS 1	LAMP TYPE F40SST12, F40T12, F30T12, FC16T9, FC12T9
-------------------------------	-----------------------------	--------------------------------	----------------------	---

ELECTRICAL CHARACTERISTICS

INPUT VOLTAGE 120v	LAMP WATTS 34/40/30/32w	INPUT POWER 36w	INPUT CURRENT 0.68 A	OCV 235v	PF NPF	FREQUENCY 60 Hz	SOUND RATED A
MIN START TEMP 60°F (50°F/40W)	CLASS P	TYPE 1 outdoor	BALLAST FACTOR 0.74	BEF 2.055	THD 12%	NO PCB'S	

PHYSICAL CHARACTERISTICS


	CASE DIMENSIONS						
	UNITS	M1	M2	M3	W	L	H
	INCHES	N / A	6.00	5.275	1.937	6.50	1.375
	TOL(+/-)		0.010	0.010	0.050	0.050	0.150
	MM	N / A	153	134	49	165	35
	TOL(+/-)		0.25	0.25	1.30	1.30	3.80
LEAD LENGTH							
UNITS	BLACK	WHITE	RED	BLUE	YELLOW		
INCHES	12	30	36	30			
TOL(+/-)	3/8	3/8	3/8	3/8			
MM	304	762	914	762			
TOL(+/-)	10	10	10	10			

CARTON CHARACTERISTICS

UNITS/CARTON 16	CARTONS/LAYER 12	# OF LAYERS 5	UNITS/PALLET 960	PIECE WEIGHT 3.31 lbs	CARTON WEIGHT 38 lbs	PALLET WEIGHT 2,364 lbs
CARTONS/PALLET 60	CARTON DIMENSIONS 12" x 12" x 4"	PALLET DIMENSIONS 40" x 48" x 7"	PALLET DIMENSIONS LOADED INCLUDING WOOD PALLET 40" x 48" x 28"			

CARTON LABEL

ELECTRICAL DIAGRAM

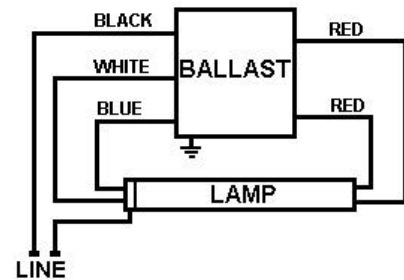

PRODUCT LABEL



Lighting and Power Source
 2707 Realty Road, Suite 110
 Carrollton, TX 75006
 Tel: (888) 385-4448
 Fax: (972) 418-5858