
Home | Language | Find a Representative | Contact Us

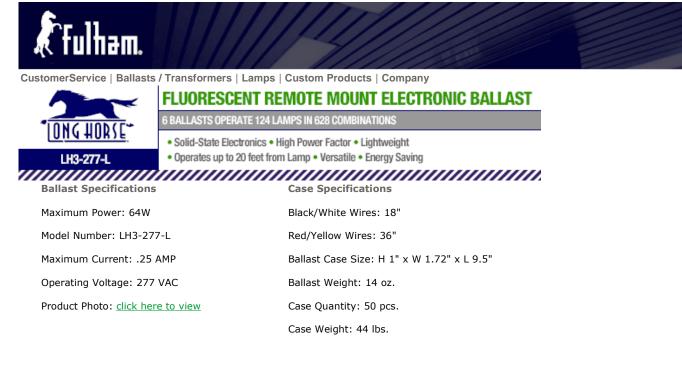

Specifications Common to all LongHorse Ballasts

Frequency: 50/60 Hz	Regulatory Approvals: UL & cUL Listed Type 1 Outdoors High Power Factor: >.90
ATHD: Meets ANSI C82.11-1993	
Protection/Output: Open Lamp Shortened Lamp	Open Circuit Voltage: 600 V RMS Max.
Protection/Overcurrent: Fuse	Min. Operating Temp.: -20* F (-30* C)
Protection/Voltage Transients: MOV (PER ANSI C82.11 - 1993)	Max. Case Temp.: 158* F (70* C)
EMI/RFI: FCC PART 18-A	Lamp Starting Mode: Instant Start
	Class P: Thermal
	Sound Rating: A