



SPECIFICATION SHEET : WHAM2-120-213-L

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Fluorescent T5 Electronic Ballast - All The Features Of WorkHorse, Thin Undercabinet Applications.


This Ballast Will Operate Following Lamps.

REFER TO LAMP WATTS/TYPE

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F24T5HO	F28T5	F14T5	F21T5	13WCFQ		-	-	-
LAMPS OPERATED	1	1	1	1	2				
INPUT WATTS	24	26	17	21	26				
LINE CURRENT:	0.21	0.23	0.15	0.20	0.23				
POWER FACTOR	0.95	0.96	0.94	0.95	0.95				
BALLAST FACTOR	0.84	0.8	0.9	1.0	0.9				
EFFICACY FACTOR	3.46	3.0	5.4	4.9	3.7				
THD	31%	28%	33%	30%	30%				
CURRENT CREST FACTOR	2.08								
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	-								
MIN. OPERATING TEMP	0 °C (32 ° F)								
MAX. CASE TEMP	75 °C (167 ° F)								
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR								

MECHANICAL DATA

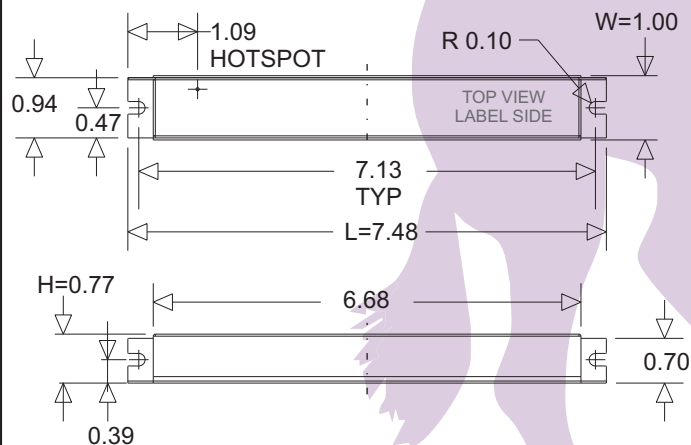

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 ± 1"	12 ± 1"	24 ± 1"	-	24 ± 1"	-

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Case Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.