




G25

Benefits

- Only 6W - Requires 85% less power than comparable 40 watt Incandescent lamp.
- Maintenance free operation, lasts up to 25 times longer than incandescent lighting.
- Dimmable to 10% on most dimmers
- RoHS compliant – contains no mercury or lead.

FEATURES¹

Equivalent Source Standard	Up to 40W Incandescent
Rated Life	25,000 hours
Housing	Aluminum
Socket	E26
Operating Temperature	-20 °C to +40 °C
E26 MOL	4.6 in, 118mm
Voltage	120 VAC
Weight	0.33lbs., 150g
Power Factor	≥.9
Warranty	5 year limited

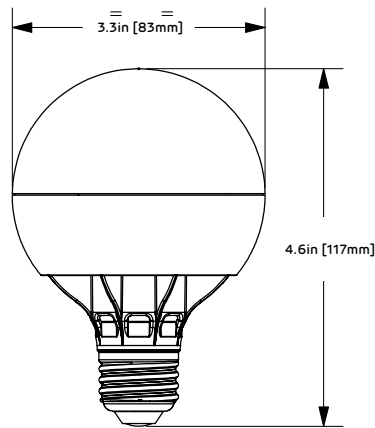

Specifications supplied are nominal. Please refer to the DOE's Lighting Facts Tolerance Guidelines.
¹ Values are nominal, advances from further innovation, specifications are subject to change.

ORDERING INFORMATION \ \ LS 25 40WE W27 120 CB BX

Family	Product	Watt Equivalent	Color (CCT)	Voltage	Family	Packaging
LS Lighting Science	25 G25	40WE 40W Equivalent	W27 Soft White 2700K	120 120 Volt	CB	BX Box

NORTH AMERICAN CERTIFICATIONS



ENVIRONMENT



G25

DIMMER CAPABILITIES¹

Lutron

C*L Wall Mount: Diva/Skylark/Skylark Contour/Ariadni/Toggler/Lumea

Maestro: MACL-153M

RadioRA2: RRD-6NA

Homeworks QS: HQRD-6NA, HxD-6ND

G25

Part Number	Base Type	Wattage	Lumens	Voltage	Efficacy	CRI
LS 25 40WE W27 120 CB BX	E26	6W	400	120	67	80

NW: Neutral White WW: Warm White W27: Soft White 2700K CW: Cool White

Recommended number of lamps per 600 watt dimmer²

While an LED lamp may draw as few as 10 watts continuously, it could have an in-rush current spike (maximum, instantaneous input) which may limit the number of lamps you can install on one dimmer. The following table provides a recommended maximum quantity of LS lamps that should be used on a typical approved 600W dimmer.

Ex: Max number of A19 60W lamps, with an 80W in-rush, that can be used on 600W dimmer = 7

LS LED Lamp	Lamp In-Rush Current Equivalent	Max # of Lamps per 600W Dimmer
LS 25 40WE	29W	20

Specifications supplied are nominal. Please refer to the DOE's Lighting Facts Tolerance Guidelines.

¹ Dimmer compatibility list indicates those dimmers that have been tested and operate properly under normal conditions. In certain cases, approved dimmers are offered in higher wattage varieties that are also compliant and allow the installation of additional lamps if kept within the maximum inrush current equivalent provided in the table. Each application is unique and various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Consult dimming system manufacturer for additional support in operation.

² Values are nominal, advances from further innovation, specifications are subject to change.



Visit www.lsgc.com/energystar for list of ENERGY STAR qualified lamps.



CAUTIONS

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS. NOT FOR USE IN TOTALLY ENCLOSED FIXTURES. CAUTION: RISK OF SHOCK – DO NOT USE WHERE DIRECTLY EXPOSED TO WATER, TURN OFF POWER BEFORE INSPECTION, INSTALLATION, OR REMOVAL. DO NOT OPEN – NO USER SERVICEABLE PARTS INSIDE. RISK OF ELECTRIC SHOCK – CERTIFIED AS SUITABLE FOR DAMP LOCATIONS (NOT RESTRICTED TO DRY).

Use only on 120 volt, 60 Hz circuits. This device complies with part 15 of the FCC rules and has been tested and found to comply with the limits for a class B digital device. This Class B digital apparatus complies with Canadian ICES-003. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. For use with light dimmers. Compatible with most dimmer switches. For complete details on our warranty and dimmer compatibility please visit www.lsgc.com/warranties and www.lsgc.com/dimmer.