

Elite Fixture General Installation Instructions


Please read instructions before proceeding with installation.

Precautions:


- Handle fixture with care to avoid possible cuts or abrasions from exposed edges. TCP suggests using work gloves when installing fixture.
- TURN OFF electricity at circuit breaker or fuse box before installation. Electricity should also be turned off before any fixture maintenance.
- Check fixture for cuts or loose connections which could have occurred during shipment. If any are found, they must be repaired before proceeding.
- To help reduce the risk of electric shock, TCP strongly recommends using a sturdy wooden or fiberglass ladder and rubber soled shoes during the installation of the fixture.

- 5. Consult your local building code for approved wiring.
- 6. Fixture must be grounded to help ensure reliable starting and to help reduce the possibility of electrical shock.
- 7. If fixture is switched from wall switch, make sure the black power supply wire is connected to the switch. Do not connect the white supply wire to the switch.
- Be certain wire nuts are tight and no bare wires are exposed outside of the wire nuts. If needed, wrap in electrical tape.

Wiring Instructions:

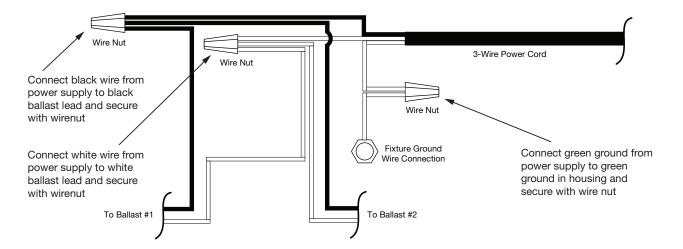

Fluorescent Lamp Installation



Elite Series: Exploded View

