



**Color:** Ivory



## IPP15-1LI

### Description

Manual-On Occupancy Sensor 1800W@120VAC INC, 1800VA@120 VAC FL, 1/2 HP, 60Hz, for single pole or 3-way applications when used with IPP0R or VZ0SR, , 180 Degree, 900 Sq. Ft. Coverage, Decora Passive Infrared Wall Switch- Ivory, California Title 24 2005 Compliant


### Product Features

Switch Type: Single-Pole & 3-Way Manual ON  
 Adjustment: Manual  
 Sensor Technology: Passive Infrared  
 Pattern Degrees: 180  
 Coverage Range Sq. Ft.: 900  
 Time Adjustment: 30s-30m  
 Load Rating: 1800W@120V INC 1800VA FL  
 Voltage: 120 Volt AC 60Hz  
 Neutral: Required  
 Color: Ivory  
 Standards and Certifications: UL/CSA  
 Warranty: 5-Year Limited  
 Code Compliance: California Title 24 2005

### Features and Benefits

- Manual-ON/Automatic OFF operation in accordance with California Title 24 2005 requirements
- Low-Profile design eliminates an obtrusive "scanning device" look. Elegant Decora styling compliments any interior and coordinates with leviton's popular line of Decora wiring devices
- 180 degree field-of-view provides approximately 900 square feet of coverage suitable for bathrooms, basements, garages, utility rooms and a variety of other residential areas
- Convenient push-button provides Manual ON/OFF light switching at any time
- Segmented fresnel lens provides optimum sensitivity and performance. It is designed with an extensive "minor motion" area where even slight body movements will be detected
- Horizontal field of view may be adjusted between 180 and 32 degrees of arc by using internal blinders located on either side of the lens
- Four optional manual adjustments for delayed-OFF time settings maximize energy savings: 30 seconds (for walking test), 10 minutes, 20 minutes and 30 minutes
- LED Indicator Light flashes when sensor detects motion to verify detection is active
- Unit can be used for 120V lighting. Compatible with both electronic and magnetic ballasts or 1/2 HP loads
- Relay switches at zero crossing point of the AC power curve to ensure maximum contact life and compatibility with electronic ballasts
- Fits in standard wallbox and replaces single-pole wall switch, 3-Way operation when used with IPP0R Series Remote Sensor or Vizia Switch Remote
- Requires a neutral (white) wire connection
- UL Listed and CSA Certified, complies with California Title 24 2005 Energy Code and FCC regulations
- Five-Year Limited warranty

**Field of View (in feet)**

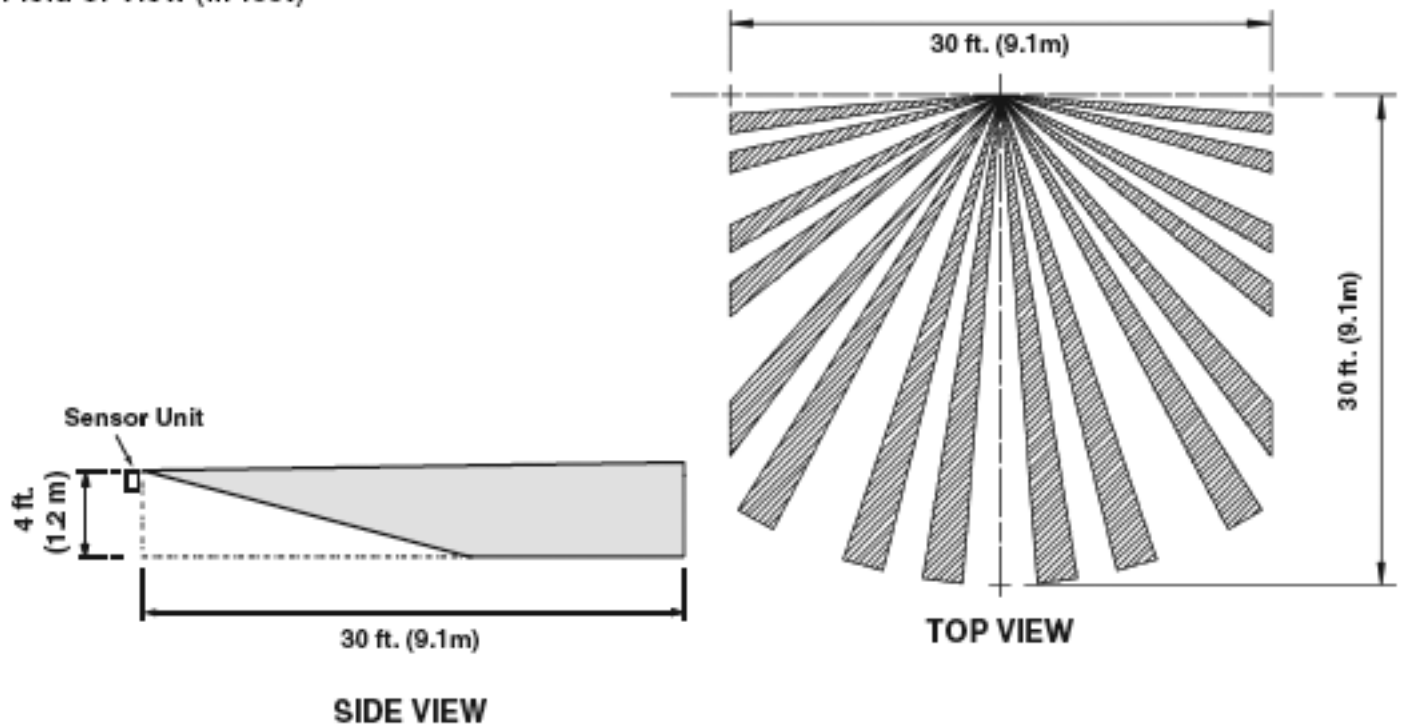

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**  
 201 North Service Road, Melville, NY 11747  
 Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**  
 165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 · FAX: 1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**  
 Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**  
 © 2007-2009 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

**Leviton has a global presence.**  
 If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

