



# MR16 Mini "Clasp" Fixture

## LAMP WATTAGE\*

- (1) 50MR16 12V GU 5.3 (not included)
- (1) 75MR16 12V GU 5.3 (not included)

\* MR16 Clasp fixture does not accept clear shield.  
Please use lamps that are inherently shielded.

## DESCRIPTION

Low voltage die cast aluminum designer open "fingered" fixtures with MR16 light source. Structural stem provides full adjustment of light source for special aiming and completely conceals wiring. Dual tightening knobs assure secure lock on angle position.

## FEATURES

- Die cast aluminum provides superior strength and rigidity
- Low profile, aesthetic design
- Adjustable stem for custom aiming
- High-strength stainless steel electrical contacts
- One or two circuit track capable

## HOUSING

.150 Die cast aluminum construction; twelve "fingers" extend out to form an open, symmetrical conical shape. Rear portion of fixture is constructed of .090 die cast aluminum with vented rear providing design feature and heat dissipation and escape.

## STEM

.065 Die cast aluminum stem connects fixture housing to electrical contact head. Lead wire is completely concealed from view within stem. Dual plastic angle tightening knobs maintain clean, decorative appearance of the fixture and provide secure angle position.

## TRANSFORMER (NTL FIXTURES ONLY)

Solid state electronic transformers provide noise-free voltage reduction and operation. If dimming, use electronic low voltage rated only dimming controls.

### NTL-210:

Integral Unit - 120V/60Hz Input; 12V Output; 50VA Max. Load

### NTL-2210 (requires separate transformer):

External Unit - NTL-2200/50: 120V/60Hz Input; 12V Output; 50VA Max. Load

External Unit - NTL-2200/75: 120V/60Hz Input; 12V Output; 75VA Max. Load

## SOCKET

Porcelain socket for GU 5.3 12V MR16 lamp.

## LAMP SHIELD

MR16 Clasp fixture does not accept clear shield.  
Please use lamps that are inherently shielded.

## CONTACT HEAD ASSEMBLY

Three .030 stainless steel contacts mounted in high heat rated plastic housing.

## ONE/TWO CIRCUIT CONVERSION

Positive contact (opposite neutral and ground contacts) is preset to "down" position at factory, but may be



NTL-210B



NTL-2210W

## PRODUCT MATRIX

CATALOG NUMBER	FINISH	BASE	WATT	VOLT	INTEGRAL TRANSFORMER	LAMP INCLUDED
NTL-210	B,W	GU 5.3	50	12	YES	NO
NTL-2210	B,W	GU 5.3	75	12	NO**	NO

\*\* NTL-2210 requires purchase of NTL-2200 transformer unit for operation.

## DIMENSIONS


### NTL - 210

<b>A: Diameter</b>	2-1/2"	(64 mm)
<b>B: Length</b>	3"	(76 mm)
<b>C: Extension</b>	6-7/8"	(175 mm)

### NTL - 2210 \*

<b>A: Diameter</b>	2-1/2"	(64 mm)
<b>B: Length</b>	3"	(76 mm)
<b>C: Extension*</b>	7-1/8"	(181 mm)

\* Extension includes NTL-2200 transformer which is required for use with NTL-2210

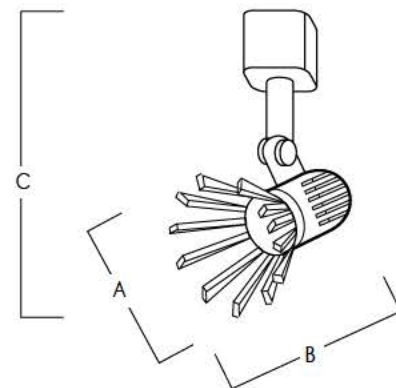

raised to the higher position to install onto the second circuit of Nora Lighting NT-2300 series two-circuit track.

## FINISHES

White or Black heat rated baked enamel paint. Custom painting or anodizing for special applications is also available. Custom finishes will require lead times that vary depending on vendor schedules. Please consult factory for quotation, and provide either a Dunn Edwards number or color chip for exact matching.

## COMPATIBILITY

Nora track fixtures are interchangeable with Halo, Catalina, Hampton Bay, Halo-Edison, or any other

brands configured to Halo track system design.  
Note: fixtures may not be compatible with non-Nora transformers or monopoint adapters.

## UL LISTED

UL Listed as track lighting fitting

## ACCESSORIES

Transformers (required for NTL-2210):

50VA . . . . .NTL-2200/50(B,W)

75VA . . . . .NTL-2200/75(B,W)

Filters . . . . .NM-110 (See accessories page)

Custom Finishes . . . Consult Factory