


## TUNGSTEN INCANDESCENT & HALOGEN LAMPS PARABOLIC ALUMINIZED REFLECTOR

### PAR SERIES

- Only for Use in Approved Enclosed Halogen Fixtures
- PAR46 - 5 3/4" Diameter; PAR56 - 7" Diameter; PAR64 - 8" Diameter
- Operate in Any Position

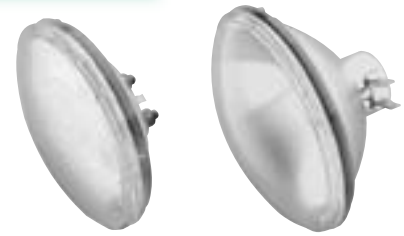

Watts	Ushio Ordering Code	Ushio Lamp Code	Dimensions mm		Approx Field Angle Degrees <sup>1</sup>	Approx Field Beam Degrees <sup>2</sup>	Approx Field Lumens Im <sup>3</sup>	Beam Spread	Color Temp K	Ave Life h
			Dia (A)	OAL (B)						
<b>PAR46 w/Medium Side Prongs - Incandescent</b>										
200	1001441	200PAR46/3NSP	143.1	101.6	—	—	—	Narrow Spot	2750	2000
200	1001439	200PAR46/3MFL	142.3	101.6	—	—	—	Medium Flood	2750	2000
<b>PAR56 – Mogul End Prong (GX16d) Base</b>										
300	1001453	300PAR56/MFL	178.6	127.0	34x19	23x11	2100	Medium Flood	2750	2000
300	1001457	300PAR56/WFL	178.6	127.0	57x27	37x18	2200	Wide Flood	2750	2000
500	1001282	Q500PAR56/NSP	178.6	127.0	32x15	13x8	4000	Narrow Spot	2950	4000
500	1001281	Q500PAR56/MFL	178.6	127.0	42x20	26x10	4800	Medium Flood	2950	4000
500	1001284	Q500PAR56/WFL	178.6	127.0	66x34	44x20	6400	Wide Flood	2950	4000
<b>PAR64 – Extended Mogul End Prong (GX16d) Base</b>										
500	1001495	500PAR64/NSP	205.7	152.4	—	—	6500	Narrow Spot	2850	2000
500	1001493	500PAR64/MFL	205.7	152.4	—	—	6500	Medium Flood	3000	2000
500	1001497	500PAR64/WFL	205.7	152.4	—	—	6500	Wide Flood	2850	2000
1000	1000519	FFN, PAR64/VNSP	205.7	152.4	24x10	12x6	11000	Very Narrow Spot	3150	800
1000	1000520	FFP, PAR64/NSP	205.7	152.4	26x14	14x7	12000	Narrow Spot	3150	800
1000	1000521	FFR, PAR64/MFL	205.7	152.4	44x21	28x12	14000	Medium Flood	3150	800
1000	1000522	FFS, PAR64/WFL	205.7	152.4	71x45	48x24	19000	Wide Flood	3150	800

<sup>1</sup> Beam Spread at 10% peak candle power

<sup>2</sup> Beam Spread at 50% peak candle power

<sup>3</sup> Measured within field angle

