



# TECHNICAL BULLETIN

## MERCURY VAPOR LAMP

### Mercury Vapor HF125PD

ANSI Code: None

Product Code: 70211



**Features:**

- Long life
- Nickel-plated base
- Rugged construction

- Applications: Roadway, Landscape, Factory, Sports, Parking, Security

### PERFORMANCE DATA


Initial lumens at rated watts after 100 hours operation	6250	lm
Mean lumens at 10 hours/start	5000	lm
Rated average life	24000	h
Warm up time (90% lumens)	4	min
Correlated color temperature	4100	K
CIE chromaticity	0.375, 0.367	x, y
Color rendering index	40	
Operating position	Universal	
Time to hot re-start (max)	10	min

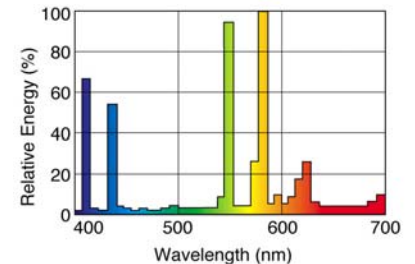

### ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	125	W
Nominal lamp voltage	125	V
Nominal lamp current	1.15	A <sub>rms</sub>
Current crest factor (max)	2	
<b>Ballast requirements</b>	125 Watt HPMV ballast	
Open circuit voltage	180	V <sub>rms</sub>
-30°C (-22°F)	255	V <sub>peak</sub>
Min. starting current	1.15	A <sub>rms</sub>
Max. starting current	2.3	A <sub>rms</sub>


### LUMEN MAINTENANCE

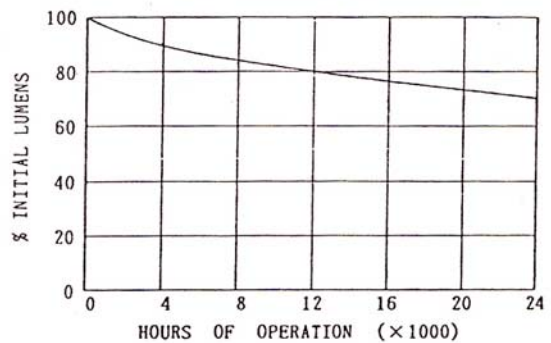

### PHYSICAL DESCRIPTION

Effective arc length	-	mm (in)
Maximum overall length	177 (6.97)	mm (in)
Light center length	115 (4.53)	mm (in)
Bulb diameter	75 (2.95)	mm (in)
Base to bulb eccentricity (max)	3	deg
Maximum base temperature	190 (374)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	E24	
Bulb material	Soft Glass (Soda Lime)	
Arc tube material	Quartz	
Bulb finish	Phosphor Coated	
Base designation	E26 Medium	

### LAMP MORTALITY

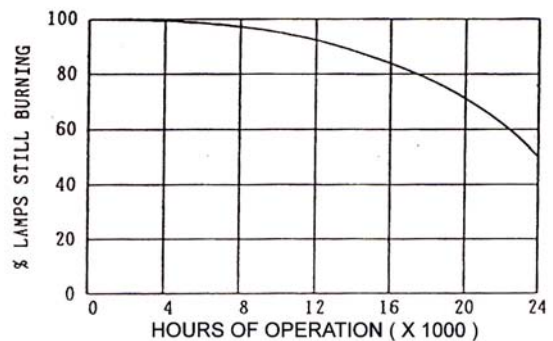

ISO 9001:2008 Certified    ISO 14001:2004 Certified  
**EYE LIGHTING INTERNATIONAL**  
**OF NORTH AMERICA, INC.**  
 A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

OSHAS 18001:2007 Certified    ISO 17025:2005 Accredited

Address: 9150 Hendricks Rd., Mentor, OH 44060  
 Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: [sales@eyelighting.com](mailto:sales@eyelighting.com)  
 Phone: (440) 350-7000 Fax: (440) 350-7001 Web: [www.eyelighting.com](http://www.eyelighting.com)



**⚠WARNING**

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

**RISK OF ELECTRIC SHOCK**

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

**RISK OF FIRE**

- Keep combustible materials away from lamp during operation

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE**

- Do not exceed rated ballast voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture and ballast rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

**⚠CAUTION**

**RISK OF BURN**

- Allow lamp to cool before handling.

**LAMP MAY SHATTER AND CAUSE INJURY**

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

**LAMP OPERATING INSTRUCTIONS**

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption. If power supply dips or is interrupted, lamps may extinguish and not restart. Turn off power supply for 10-15 minutes and allow lamp to fully cool. Lamp will restart when power is restored.

<b>R</b>	Conforms to: USA: 21CFR1040.30 Canada: ANSI 136.1-2000
----------	---

(Hg) - LAMP CONTAINS MERCURY. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677.



ISO 9001:2008 Certified    ISO 14001:2004 Certified

**EYE LIGHTING INTERNATIONAL**  
**OF NORTH AMERICA, INC.**  
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

OSHAS 18001:2007 Certified    ISO 17025:2005 Accredited

Address: 9150 Hendricks Rd., Mentor, OH 44060  
Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: [sales@eyelighting.com](mailto:sales@eyelighting.com)  
Phone: (440) 350-7000 Fax: (440) 350-7001 Web: [www.eyelighting.com](http://www.eyelighting.com)