

## SPECIFICATION SHEET

**2001 SERIES**   
**1/2" CONDUIT MOUNTING**  
**180° SWIVEL, LEXAN® HOUSING**  
**PHOTOCONTROL**



### APPLICATIONS

- Parking lot lighting.
- Building lighting.
- Outdoor signs.

### FEATURES

#### SENSOR:

Conformal coated cadmium sulphide photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.

#### OPERATION:

Delay up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

#### STANDARDS:

Meets ANSI /UL773A.

#### HOUSING:

All Lexan® enclosures are impact and vandal resistant. Translucent Lexan® Dome prolongs cell life by further screening out ultraviolet rays. Dome and base are ultrasonically welded for maximum strength.

#### ENERGY SAVINGS:

Works with screw base CFLs and LED lamps.

### SPECIFICATIONS

#### ON/OFF:

Turn ON is 1 to 5fc. Turn OFF is 3 to 15fc, without the slide in position. ON/OFF adjustment is easily made by moving a slide cover. No tools required.

#### TIME DELAY:

ON and OFF.

#### CELL:

Cadmium sulphide, epoxy conformal coated 1/2" diameter.

#### CONTACTS:

Remain closed between dusk and dawn. (The unit fails in the ON position).

#### LEAD WIRES:

Three color coded, minimum 6" wire leads, #16AWG, rated for 105 °C.

#### POWER CONSUMPTION:

Averages under 1 watt.

#### TEMPERATURE RANGE:

-40 °F to 140 °F (-40 °C to 60 °C).

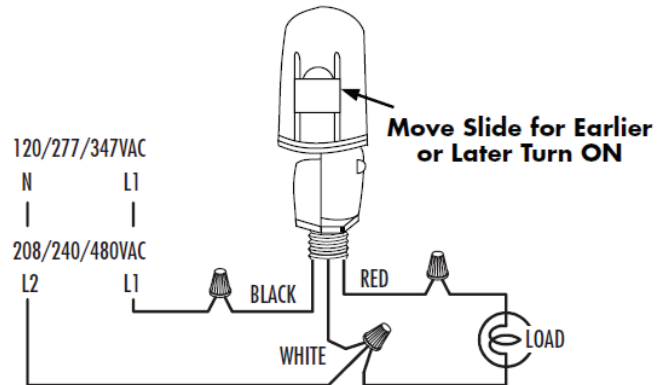
#### FAIL MODE:

ON.



#### WARRANTY:

5 years.

### WIRING DIAGRAMS





### ORDERING INFO

CAT. NO.	UPC CODE	VOLTAGE (VAC) 50-60Hz
2001	60015	120
2002	60016	208-277
 2006*	60028	347
 2018**	62021	480
73866	62020	Mounting Bracket

\*CSA certified only.  \*\*Not UL or CSA rated.

### CONTACT RATINGS

CAT. NO.	SWITCH	RATING	
		TUNGSTEN	BALLAST
2001	SPST	2000W	1800VA
2002	SPST	3470-4620W	2080-2770VA
 2006*	SPST	5760W	3470VA
 2018**	SPST	7500W	4800VA
73866	-	-	-

\*CSA certified only.  \*\*Not UL or CSA rated.