

IMPORTANT SAFETY INSTRUCTIONS

- Fixture can NOT be used with a dimmer switch, motion or occupancy sensors and other electronic switching devices unless otherwise designated.
- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- **DO NOT INSTALL DAMAGED PRODUCT!**
- Recycle: For information on how to recycle LED electronic products, please visit www.epa.gov.
- This fixture should not be used in areas with limited ventilation or high ambient temperatures.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purpose, this matter should be referred to Acuity Brands Lighting, Inc.
- This fixture is designed for indoor use ONLY and should not be used in areas with limited ventilation or high ambient temperatures.
- Fixture must be connected to a nominal 120Volt, 60 Hz power source. Any other connection voids warranty.
- This fixture is intended to be connected to a properly installed and grounded UL listed outlet (not provided) and should be installed according to NEC and local

⚠WARNING:

- **RISK OF ELECTRICAL SHOCK**
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

⚠CAUTION: RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

⚠WARNING: RISK OF BURN

- Allow fixture to cool before handling. Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.


⚠CAUTION: RISK OF FIRE

- Keep combustible and other materials that burn away from luminaire and lamp/lens.
- Minimum 90° C supply conductors.

- Mantenga lejos de la luminaria y de las lámparas/lentes, los materiales combustibles y de otro tipo que se puedan incendiar.
- Conductores de alimentación de un mínimo de 90° C.

Model Number / Número de Modelo / Numéro des modèle

SHLP/SHLA

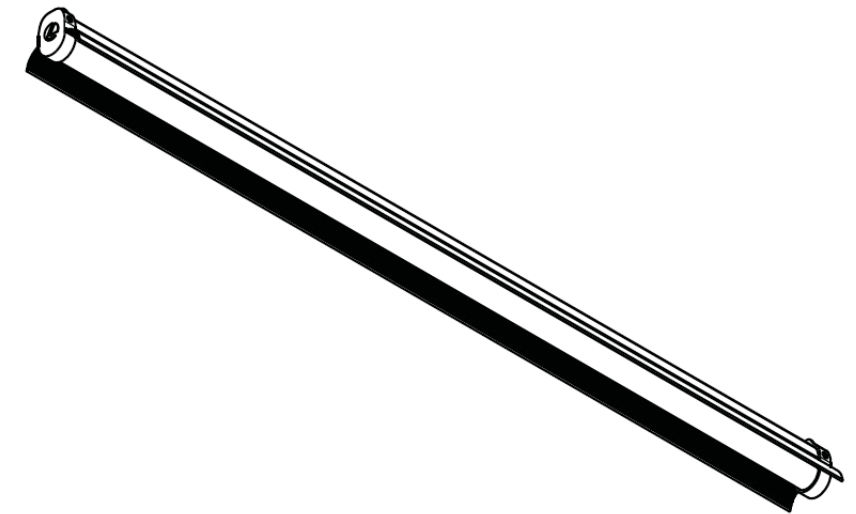

Protect yourself. Before installing, read these instructions carefully and save them for future reference.
Date installed: _____

REQUIRED TOOLS
HERRAMIENTAS REQUERIDAS
OUTILS REQUIS



FIXTURE PARTS LIST

Description	Quantity
1) Fixture Assembly.....	1
2) Chain*.....	2
3) S-Hook*.....	2

*Contained in Part Packs

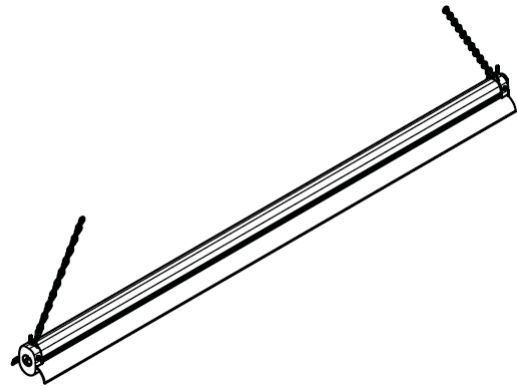


Figure 1

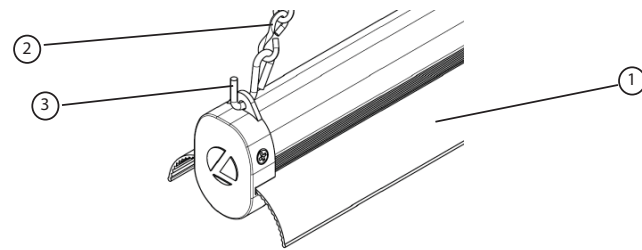


Figure 2

STEP-BY-STEP GUIDE

1. Remove fixture assembly and parts pack(s). Check that all parts are included. See page 2.

Warning: Safely dispose of packaging materials.
Assistance may be required to support fixture during installation.

2. Install two hooks (not supplied) in ceiling. Attach "S" hook (3) to chain (2), and through hole on top of each end of fixture (1) (See Fig.2). Crimp both ends of hook (3). Note: Maximum distance to electrical outlet is determined by the length of power cord on fixture.

3. Plug in power cord on fixture.

Trouble Shooting Guide

If this fixture fails to operate properly, use the guide below to diagnose and correct the problem.

- Verify that fixture is grounded correctly.
- The line voltage at the fixture is correct.

If further assistance is required, contact:
Technical Support at:
(800) 748-5070.

This LED light provides low maintenance service with no bulbs to change. Clean surfaces with mild soap and water. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.