

ELP LED Emergency Driver

For Field
& Factory
Installation



(Optional LED Module)



Separate Driver +
Battery Model

Constant Power Output



For Field & Factory
Installation

Available in
5W & 12W

For Factory
Installation


ELC LED Emergency Driver

Adjustable Output
(Constant Current)



For Factory Installation

Available in
8W & 12W

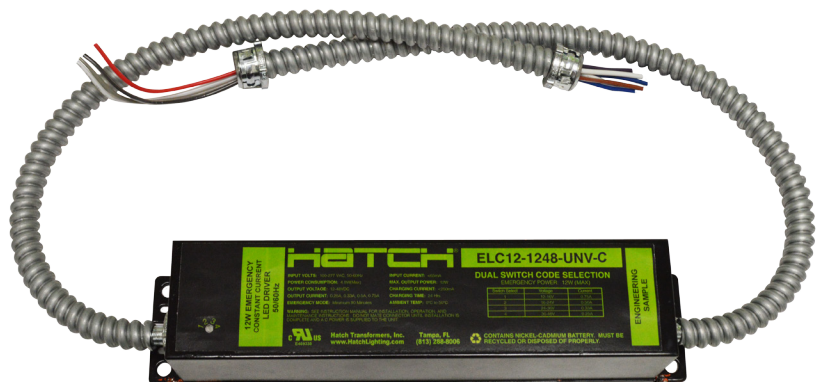

All-in-One Model

Which Model is Best for Your Application Needs?



ELC

ELC08-1248-UNV
ELC08-1248-UNV-C
ELC12-1248-UNV
ELC12-1248-UNV-C

- Constant Current Manual Adjustable Output Current
- Forward Voltage Range: **12-48V**
- Available with or without Conduit
- All-in-One unit: Emergency Driver and 90+ Min Battery
- 10.42" x 2.18" x 2.17"
- For Use with Switched or Un-Switched Fixtures
- For Use with Emergency Only Fixtures AND Fixtures with External Constant Current LED Drivers
- Available in 8W or 12W
- Includes Test Switch and Charge Indicator Accessory Plate Kit



- **UL Recognized** for Factory Installation



ELP

ELP05-UNV-K
ELP12-UNV-K

- Constant Power Automatically senses Output Voltage Needed to Power the LED
- Forward Voltage Range: **12-39V**
- Available without Conduit
- 2 Separate pieces for Installation Flexibility: Emergency Driver and separate 90+ Min Battery
- Available in 5W or 12W
- Driver: 6.46" x 1.37" x 1.00"
5W Battery: 8.07" x 1.97" x 1.01"
12W Battery: 9.45" x 2.24" x 1.15"
- For Use with Switched or Un-Switched Fixtures
- For Use with Emergency Only Fixtures AND Fixtures with External LED Drivers Constant Current or Constant Voltage
- Includes Test Switch and Charge Indicator Accessory



- **UL Classified** for Field or Factory Installation



ELP Kit w/ Module

ELP05-UNV-K-DP
ELP12-UNV-K-DP

- Constant Power Automatically senses Output Voltage Needed to Power the LED Module
- Forward Voltage Range: **12-39V**
- Available without Conduit
- 2 Separate pieces for Installation Flexibility: Emergency Driver and separate 90+ Min Battery
- Kit Also Includes an LED Module
- Available in 5W or 12W
- Driver: 6.46" x 1.37" x 1.00"
5W Battery: 8.07" x 1.97" x 1.01"
12W Battery: 9.45" x 2.24" x 1.15"
5W Module: 5.91" x 0.91"
12W Module: 8.66" x 0.91"
- For Use with Switched or Un-Switched Fixtures
- For Use in Fixtures with External LED Drivers Constant Current or Constant Voltage, LED Fixtures with Internal Drivers such as LED Tubes, Fluorescent Fixtures and More.
- Includes Test Switch and Charge Indicator Accessory



- **UL Classified** for Field or Factory Installation