

The Helen Lamp

The first Plug and Play LED replacement for CFLs.



A growing family


Now, with 2-pin and 4-pin lamp options, you can get Helen's superior light quality in even more places. These modest beauties tuck away quietly in recessed fixtures, but surprise everyone with beautiful natural light and huge savings.





Plug and Play

Lunera's BallastLED™ technology allows you to leverage existing fixtures and ballasts, creating the simplest and most cost effective way to convert to LED. Just plug the lamp into your existing G24q and G24d series sockets and start enjoying superior lighting quality. No need to bypass the ballast.

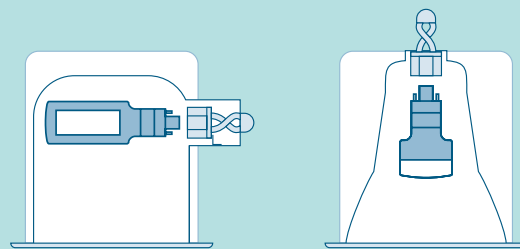


The Helen Lamp LED Replacement for 4-pin and 2-pin CFLs



Long lifespan = big savings

The Helen Lamp lasts for more than 50,000 hours. That's 5x longer than CFLs, meaning far fewer service cycles and far fewer replacement lamps. Add that to 50% energy savings compared with 26W CFLs, and it quickly turns into a big pile of savings.

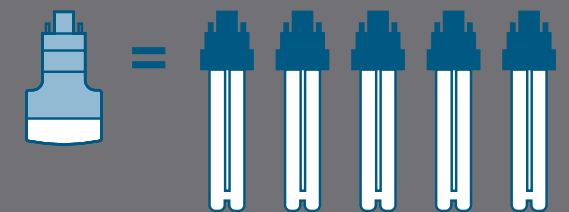

Helen Lamp Highlights

Input Voltage	Driven by CFL ballast	Color Temp	2700K, 3000K, 3500K, 4000K
Power	13W	Life	50,000 hours life (L70)
CRI	84	Warranty	5 years
Delivered Lumens	900 lm	Compatibility	Non-lensed and non-dimming fixtures with G24q-series 4-pin or G24d-series 2-pin CFL sockets.

Ordering Info | Example: HN-V-G24Q-26W-2700-G2

Series	Version	Socket Type	Lamp Wattage Replaced	CCT	Generation
HN: Helen Lamp	V: Vertical VL*: Vertical Long H: Horizontal *VL available in 4-pin only	G24Q: Recessed downlight with G24q series 4-Pin CFL socket G24D: Recessed downlight with G24d series 2-Pin CFL socket	26W: 26W, 32W, or 42W CFL	2700: 2700 K 3000: 3000 K 3500: 3500 K 4000: 4000 K	G2: 2 nd Generation

Big energy savings

