







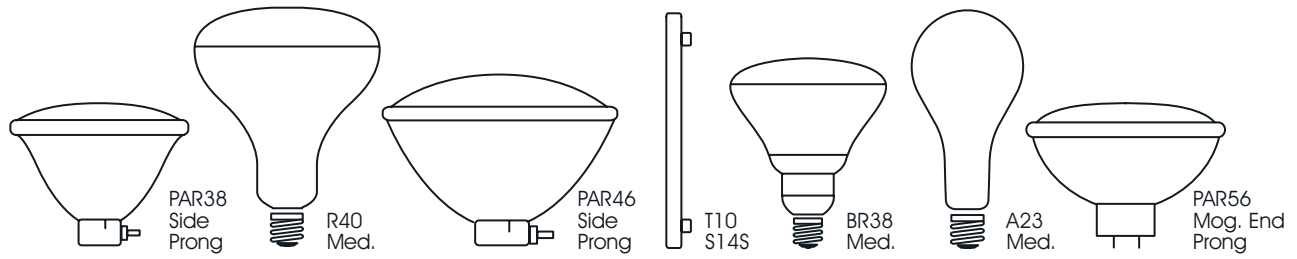


# Incandescent Lamps



incandescent lamps

Watts	Bulb	Base	Safco Product Number	Lamp Code	Volts	Finish	Master/Inner Carton	Pkg. Type	Filament	Avg. Rated Hours	Lumens	MOL	Notes
<b>150</b>		Side Prong	<b>S4802</b> ▲	150PAR/3FL/MINE	120	Clear	12	Box	CC-6	2000	1740	4 5/16"	
			<b>S4803</b> ▲	150PAR/3SP/MINE	120	Clear	12	Box	CC-6	2000	1740	4 5/16"	
		Med.	<b>S4827</b> ■	150R40FL/VLX	120	Nat Day Frosted	50/10	Box	C-9	5000	1450	6 1/2"	3
		Side Prong	<b>S4339</b> ▲	150PAR46/3NSP	125	Narrow Spot	12	Box	CC-2V	2000	1500	4"	
			T10 S14S	<b>S4895</b> ▲	LN150	125	White	16	Box	C-8	1000	930	39 3/8"
<b>175</b>		Med	<b>S4751</b>	175BR38/HR	120	Red Heat	12	Box	C-9	5000	-	5 5/16"	
<b>200</b>		Med.	<b>S3983</b>	200A23/CL	130	Clear	24	Box	C-9	2500	2500	6 1/16"	
			<b>S3982</b>	200A23/F	130	Frosted	24	Box	C-9	2500	2500	6 1/16"	
		Side Prong	<b>S4340</b> ▲	200PAR46/3MFL	120	Med Fld	12	Box	CC-13	2000	2270	4"	
			<b>S4341</b> ▲	200PAR46/3MFL	125	Med Fld	12	Box	CC-13	2000	2270	4"	
			<b>S4342</b> ▲	200PAR46/3NSP	120	Nar Spot	12	Box	CC-13	2000	2270	4"	
			<b>S4343</b> ▲	200PAR46/3NSP	125	Nar Spot	12	Box	CC-13	2000	2270	4"	
		Mog End Prong	<b>S4344</b> ▲	200PAR56/MFL	120	Med Fld	12	Box	CC-13	2000	2270	5"	
<b>250</b>		Med.	<b>S4999</b>	250R40/1	120	Cl. Heat	12	Sleeve	C-9	5000	-	6 1/2"	
			<b>S4885</b>	250R40/1/TF	120	Cl. Heat ShatterPrf	12	Sleeve	C-9	5000	-	6 7/8"	
			<b>S4998</b>	250R40/HR	120	Red Heat	12	Sleeve	C-9	5000	-	6 1/2"	
			<b>S4884</b>	250R40/HR/TF	120	Red Heat ShatterPrf	12	Sleeve	C-9	5000	-	6 7/8"	

Don't see the lamp you need? Call Customer Service 1-800-43-SATCO

When using a 130 Volt Lamp on a 120 Volt line, life is extended by approx. 2.5 times and lumens are reduced approx. 20%