



TECHNICAL DATA SHEET

The LED Emergency Pack allows the same LED fixture to be used for both normal and emergency operations. In the event of a power failure, the LED Emergency Pack switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger and converter circuit.

55281 EMERGENCY PACK

LED EMERGENCY PACK FOR PRODUCTS WITH
AN EXTERNAL DRIVER

FEATURES

- Dial code with 4 power options
- Constant output power
- Rechargeable Ni-Cd long life high temperature battery
- Includes test switch and charge indicator accessory kit


PRODUCT DETAILS

ELECTRICAL	
Output Power (max.)	25W
Output Voltage	12V - 48Vdc
Output Current (max.)	2083mA
Input Power (max.)	7.5W
Input Voltage	100-277V - 50/60 Hz
Input Current (max.)	90mA
LIFESPAN	
Warranty (Years)	5
Battery Recharge	24 Hours
Battery Life	7-10 Years
UL Conditions	Must be factory wired battery temperature must not exceed 50°C
CONSTRUCTION	
Housing	High Temperature Nickel Cadmium
Base / Power Supply	Hard Wired
PACKAGING	
Master Carton	10pc / 10899645001322
Individual Box	899645001325
Country of Origin	China
HS Tariff	9405.40.8200
CERTIFICATIONS	




DIAL CODE SELECTION					
CODE SWITCH			VOLTAGE	POWER	EMERGENCY
1	2	3			
--	--	--	12-48V	25W	90 Min.
--	--	ON		18W	100 Min.
--	ON	--		12W	160 Min.
ON	--	--		6W	330 Min.

DIMENSIONS	
Dimensions (Inches)	16.2"(L) x 2.78"(W)

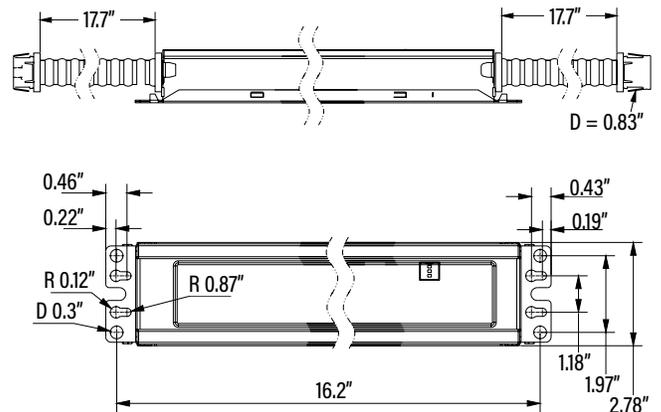

WIRING DIAGRAM

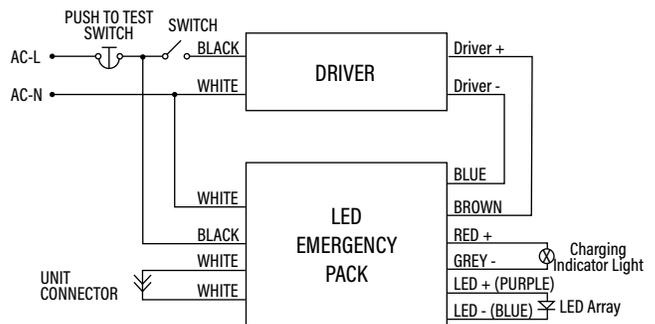

1. Do not mate connector until installation is complete and power is supplied.
2. Test accessory leads - observe proper polarity wiring.

ORDERING

ITEM#	DESCRIPTION	CASE
55281	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN/V5 - SUPERIOR LIFE®	10