



## 23W EL/A PAR38 IBC

### Product family description

Looking for an energy saver that does not look like one? The Philips EnergySaver family provides energy efficient lighting options that don't just provide similar light as your standard incandescent light bulb, they also have the same classic shapes. Philips EnergySaver reflector flood compact fluorescents reduce operating costs without sacrificing light quality compared to incandescent equivalents. With dimmable and hard glass options, they are ideal for recessed and track lighting indoors and outdoors.

### Features

- Provide soft white light with excellent beam control.
- Lasts at least 7 years\*.
- Save up to 75% in electricity costs when compared to an equivalent incandescent bulb.
- The glass coating enables excellent lumen maintenance.
- Circuit designed with end of life protection.
- Available in: 14 watt R20, 15 and 16 watt R30, 20 and 23 watt R40 and Par 38, and 23 watt Par 38 and 16W PAR 30 2 piece versions.
- \* Based on approximately 3 hours usage per day/7 days per week.

### Benefits

- Philips Energy Saver Reflectors provide energy savings and reduced operating costs without sacrificing quality of light compared to standard incandescent equivalents.
- RoHS compliant.
- Dimmable Reflectors are dimmable to 10% of full light levels and available in PAR38, R30 and R40. Hard glass, or "flat face" reflectors offer solid, heavy-duty construction with excellent beam control.

### Application

- Ideal for use in recessed fixtures or track lighting.

### Notes


- \*Based on an average daily usage of 3 hours per day, 7 days per week.
- Approximate initial lumens - the lamp lumen output is based upon lamp performance after 100 hours of operating life under standard laboratory conditions.
- Rated Average Life-Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Use in recessed cans or enclosed indoor fixtures could result in reduced lamp life.
- Amalgam Technology provides stable light output from -4F to 122F.
- Warnings and Cautions - Some electronic timer and photo sensor switches contain dimming circuitry, so before using such a switch check with its manufacturer to ensure compatibility with electronic CFL bulbs. Do not use with emergency exit fixtures or lights. Outdoor use requires a weather-protected fixture. Turn off power before changing bulb. The device complies with Part 18 of the FCC rules.
- Reliable operating temperature range -4F/-20C to 122/50C.
- This product may cause interference with radios, televisions, telephones or remote controls. If interference occurs, move this product away from device or plug into another outlet.

Product data	
Product Number	212407
Full product name	23W EL/A PAR38 IBC
Ordering Code	BC-EL/A PAR38 23W
Pack type	1 Lamp in a Blister Card
Pieces per Sku	1
Skus/Case	2
Pack UPC	046677152857
EAN2US	
Case Bar Code	50046677212402
Successor Product number	
Base	Medium [Single Contact Medium Screw]
Bulb	EL/A PAR38
Packing Type	IBC [1 Lamp in a Blister Card]
Packing Configuration	2
Rated Avg. Life [3 hr Start]	8000 hr
Ordering Code	BC-EL/A PAR38 23W
Pack UPC	046677152857
Case Bar Code	50046677212402
Energy Saving	Energy Saving
Watts	23W
Mercury (Hg) Content	3.5 mg
Color Rendering Index	82 Ra8

Product data	
Color Temperature	2700 K
Initial Lumens	1250 Lm
Max Overall Length (MOL) - C	6.5 in
Product Number	212407



CI-RefIA

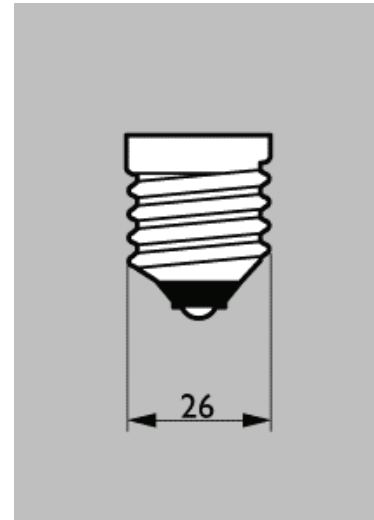

Cap-Base E26



Energy Saving Product Energy Saving



©2009 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Document order number : 0000 000 00000