

# LED Corn Bulb


## 100W

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**

### CAUTIONS

- Professional installation required. Work should be performed by a qualified electrician.
- Turn power off before inspection, installation, or removal.
- Risk of electric shock - Do not use where exposed to water or weather.
- Suitable for Damp Locations
- The lamp is suitable for use in wet locations when used in an outdoor rated fixture.
- Do not open – no user serviceable parts inside.
- LED Retrofit lamps require 120V-277V input voltage.
- Not for use with dimmers.
- This Device is not intended for use with emergency exits or emergency lights.
- This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

**Safety Cable Instruction:** Always have a qualified electrician do your electrical work.



#### STEP 1

Carefully squeeze the loop end of the safety cable to allow the loop to easily through safety cable slot.



#### STEP 2

Insert the safety cable through the safety cable slot on the side of the plastic base.



#### STEP 2

Pull out the safety cable from the slot by using included tool to carefully grasp and help pull it out of slot.



#### STEP 4

Push the safety cable's loop completely through safety cable slot and insert hook end of cable through the loop.



#### STEP 5

Pull the hook end of the safety cable completely through the cable's loop.




#### STEP 1

After completing the Fixture Wiring instructions (see section 3 below), install lamp in the fixture's socket. Buckle the safety cable to the fixture and install the lamp.

## BYPASS BALLAST INSTALLATION INSTRUCTIONS

1. Always have a qualified electrician do your electrical work.
2. Disconnect power from the luminaire and follow proper lockout/tagout procedures before beginning installation or maintenance.
3. Remove the existing lamp. Dispose of the lamps per local requirements.
4. Disconnect and remove the existing ballast, capacitor, and ignitor. Dispose of the components per local requirements.
5. Connect the Line wire (Line/Hot) to the center contact (eyelet) of the lamp holder.
6. Connect the Neutral wire (Common) to the shell of the lamp holder.
7. Close the wiring compartment. Watch to be sure the wires are not pinched, bound, or crimped when closing the compartment.
8. Insert and screw in the LED Retrofit lamp into the lamp holder, ensure the safety cable is installed onto the lamp as shown in the Safety Cable Instructions (see section two above).
9. Switch on the power.

## Replacing Self Ballasted CFL Lamp

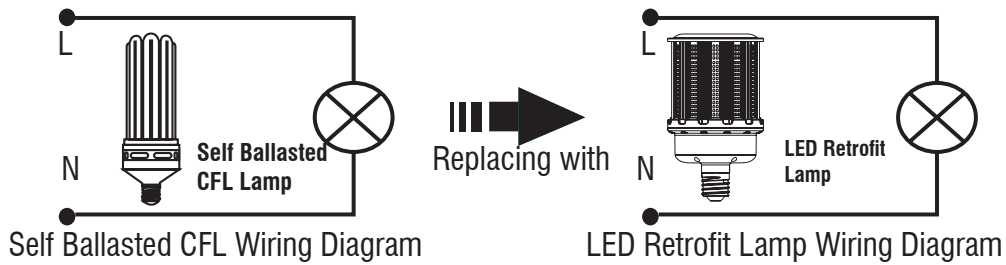

## Replacing HPS/HID Lamp

