

PRO





11W REPLACES



**26W  
CFL**

60% Energy Savings

- ⌚ Easy to install - Plug & Play Direct
- ⌚ Ballast output power control technology
- ⌚ Exceptional efficacy 91 LPW
- ⌚ Lasts 4 times longer than CFL
- ⌚ Compatible with most electronic ballasts
- ⌚ Available in 2700K, 3000K, 3500K, 4000K & 5000K CCT



LM 79

LM 80

TM 21



## PL PRODUCT FEATURES

### Ballast Output Control Technology

The PL DIR lamp's ballast output power control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W, 32W and 42W CFL PL lamps.

Ballast Type	Lumens	Bare Lamp
13W	720	8W
18W	850	9.5W
26W	1000	11W

### Adjustable Base



This PL H lamp features a base that can be rotated 170° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

## APPLICATIONS

### Retail



### Hospitality




### Office



Ref.#:DS040-PLH-11W-DIR

**Base:** G24q & GX24q (4-pin CFL)  
**Voltage:** Ballast compatible 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 40,000 hrs  
**Weight:** 0.27lb / 123g

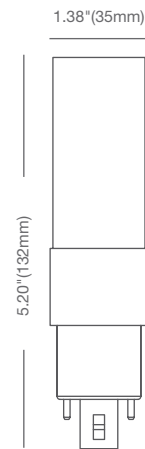

## SPECIFICATIONS\*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
<a href="#">11PLHG4/827/DIR</a>	40817	11	Warm White 2700K	80	850	77	110°
<a href="#">11PLHG4/830/DIR</a>	40818	11	Warm White 3000K	80	920	84	110°
<a href="#">11PLHG4/835/DIR</a>	40819	11	Neutral White 3500K	80	950	86	110°
<a href="#">11PLHG4/840/DIR</a>	40820	11	Natural White 4000K	80	1000	91	110°
<a href="#">11PLHG4/850/DIR</a>	40821	11	Daylight 5000K	80	1000	91	110°

## BALLAST PERFORMANCE

Ballast Type	Bare Lamp (W)	System (W)	2700K Lumens	3000K Lumens	3500K Lumens	4000K Lumens	5000K Lumens
<b>13W</b>	<b>8</b>	<b>9.4</b>	<b>610</b>	<b>660</b>	<b>680</b>	<b>720</b>	<b>720</b>
<b>18W</b>	<b>9.5</b>	<b>11.3</b>	<b>720</b>	<b>780</b>	<b>805</b>	<b>850</b>	<b>850</b>
<b>26W</b>	<b>11</b>	<b>13.4</b>	<b>850</b>	<b>920</b>	<b>950</b>	<b>1000</b>	<b>1000</b>
<b>42W</b>	<b>11</b>	<b>13.8</b>	<b>850</b>	<b>920</b>	<b>950</b>	<b>1000</b>	<b>1000</b>
<b>UNV</b>	<b>11</b>	<b>12.9</b>	<b>850</b>	<b>920</b>	<b>950</b>	<b>1000</b>	<b>1000</b>

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

\* Specification data is preliminary and may be subject to change

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Not intended for use in enclosed fixtures

\*\*\*\* Full installation guide and more details available on website