

Absorbent Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

Maintenance-Free

### Specification

<b>Nominal Voltage</b>	12 volts		
<b>Nominal Capacity</b>	77° F (25° C)		
10-hr. (230 mA)	2.3 Ah		
5-hr. (410 mA)	2.05 Ah		
1-hr. (1.5 A)	1.5 Ah		
<b>Approximate Weight</b>	1.71 lbs (0.78 kg)		
<b>Internal Resistance (approx.)</b>	100mΩ		
<b>Shelf Life (% of normal capacity at 77° F (25° C))</b>			
3 Months	6 Months	12 Months	
91%	82%	64%	
<b>Temperature Dependency of Capacity</b>	(20 hour rate)		
104° F	77° F	32° F	5° F
102%	100%	85%	65%
<b>AGM Operational Temperature</b>	-20°C to 45°C		
<b>AGM Storage Temperature</b>	-20°C to 45°C		




### Charge Method (Constant Voltage)

### Cycle Use (Repeating Use)

Initial Current	0.9 A or smaller
Control Voltage	14.5-14.9 V


### Physical Dimensions: in (mm)




**L:** 7.17in (182 mm)  
**W:** 0.93in (23.7 mm)  
**H:** 2.42in (61.5 mm)  
**TH:** 2.43in (61.7 mm)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

### Terminals



### Discharge Time vs. Discharge Current

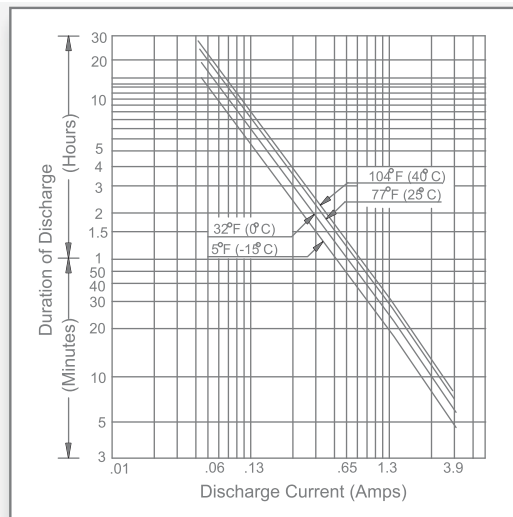

### Discharge Characteristics

