

COB Model	Drive Current (mA)	Voltage (VDC) Min	Voltage (VDC) Max	Match-Book Sized Model Number	Iout (mA)	Vout (VDC) Min.	Vout (VDC) Max.	Match-Book Sized Driver Image
Vero 10B-Gen 7	270mA	32V	38V	AC10CD250AT2K	250mA	32V	40V	
Vero 10D-Gen 7	350mA	24V	28V	AC25CD700AT2Q	350mA	24V	36V	
Vero 13D-Gen 7	500mA	29V	35V	AC40CD1.05AT2S	500mA	23V	38V	
Vero 18D-Gen 7	1050mA	26V	32V	AC40CD1.05AS2	1050mA	23V	38V	
Vero 10-Gen 6	350mA	24V	29V	AC25CD700AT2Q	350mA	24V	36V	
Vero 13-Gen 6	500mA	29V	35V	AC25CD700AT2Q	500mA	24V	36V	
Vero 18-Gen 6	1050mA	27V	32V	AC40CD1.05A2S	1050mA	23V	38V	





Nominal Flux	Drive Current (mA)	Voltage (VDC) Min	Voltage (VDC) Max	Match-Book Sized Model Number	Iout (mA)	Vout (VDC) Min.	Vout (VDC) Max.	Match-Book Sized Driver Image
9mm LES 2000 lm Standard/Vibrant V95	1050mA	23V	31V	AC40CD1.05AT2S	1050mA	23V	38V	
19mm LES 4000 lm Standard/Vibrant V80	1400mA	28V	36V	AC60CD1.4AT2S	1400mA	26V	43V	
19mm LES 5000 lm Standard/Vibrant V80	1400mA	28V	36V	AC60CD1.4AT2S	1400mA	26V	43V	
19mm LES 4500 lm Designer	1400mA	28V	36V	AC60CD1.4AT2S	1400mA	26V	43V	
19mm LES 2000 lm Artist/Vibrant V95	1050mA	17V	24V	AC25CD1.05A3N	1050mA	14V	24V	
19mm LES 3000 lm Artist/Vibrant V95	1050mA	26V	35V	AC40CD1.05A2S	1050mA	23V	38V	
19mm LES 2000 lm Beauty	1050mA	17V	24V	AC25CD1.05A3N	1050mA	14V	24V	




Nominal Flux	Drive Current (mA)	Voltage (VDC) Min	Voltage (VDC) Max	Match-Book Sized Model Number	Iout (mA)	Vout (VDC) Min.	Vout (VDC) Max.	Match-Book Sized Driver Image
CXA1304 36V	100mA	36V	42V	AC15CD250AT2Q	100mA	32V	60V	
CXB1304 36V	100mA	34V	38V	AC15CD250AT2Q	100mA	32V	60V	
CXA1510 36V	250mA	35V	42V	AC15CD250AT2Q	250mA	32V	60V	
CXB1520 36V	500mA	33V	37V	AC40CD1.05AT2S	500mA	23V	38V	




Matches →

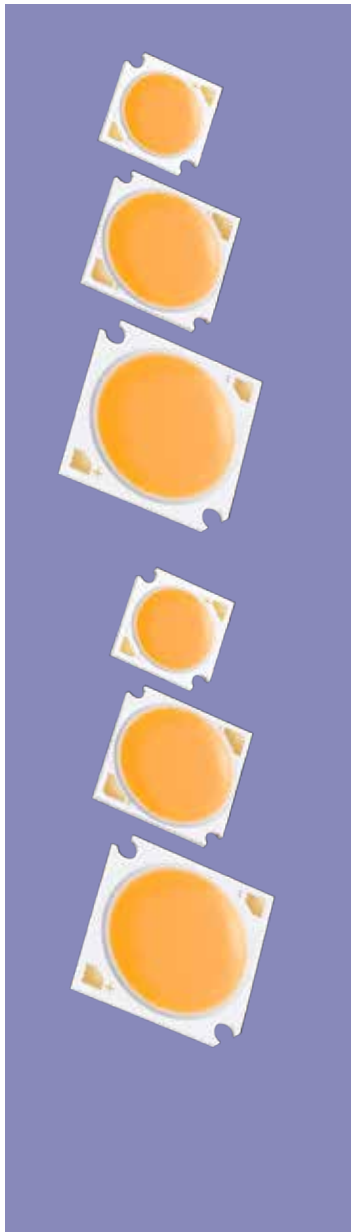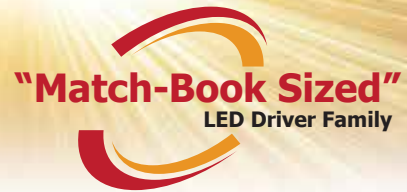

COB Model	Drive Current (mA)	Voltage (VDC) Min	Voltage (VDC) Max	Match-Book Sized Model Number	Iout (mA)	Vout (VDC) Min.	Vout (VDC) Max.	Match-Book Sized Driver Image
LC006D	180mA	31V	38V	AC10CD250AT2K	175mA	32V	40V	
LC009D	270mA	31V	38V	AC10CD250AT2K	250mA	32V	40V	
LC019D	540mA	31V	38V	AC40CD1.05AT2S	500mA	23V	38V	
LC026D	720mA	31V	38V	AC40CD1.05AT2S	700mA	23V	38V	
LC040D	1080mA	31V	38V	AC40CD1.05AT2S	1050mA	23V	38V	

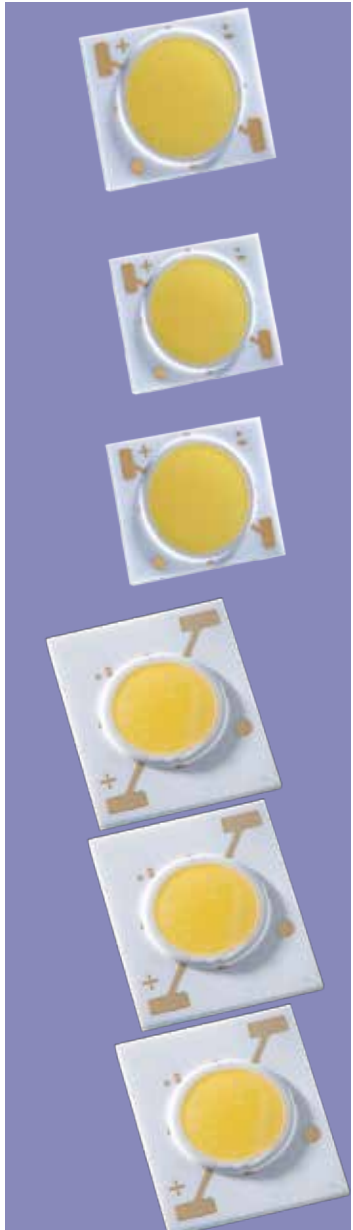

Nominal Flux	Drive Current (mA)	Voltage (VDC) Min	Voltage (VDC) Max	Match-Book Sized Model Number	Iout (mA)	Vout (VDC) Min.	Vout (VDC) Max.	Match-Book Sized Driver Image
NFCWL036B-V2	260mA	34V	37V	AC10CD250AT2K	250mA	32V	40V	
NFCWL060B-V	460mA	34V	37V	AC40CD1.05AT2S	500mA	32V	40V	
NFCWL072B-V2	540mA	34V	37V	AC40CD1.05AT2S	500mA	32V	40V	
NFCWJ084B-V2	670mA	35V	37V	AC40CD1.05AT2S	700mA	32V	40V	
NFCWJ096B-V2	760mA	35V	37V	AC40CD1.05AT2S	700mA	32V	40V	
NFCWJ120B-V2	1050mA	35V	37V	AC40CD1.05AT2S	1050mA	32V	40V	

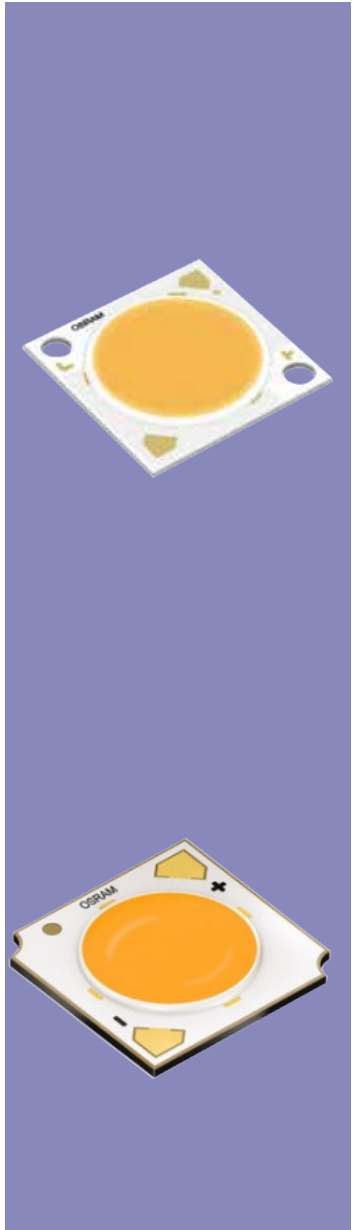

COB Model	Drive Current (mA)	Voltage (VDC) Min	Voltage (VDC) Max	Match-Book Sized Model Number	Iout (mA)	Vout (VDC) Min.	Vout (VDC) Max.	Match-Book Sized Driver Image
SolarIQ S 19								
GW KAHLB2.CM	700mA	34V	36V	AC25CD700AT2Q	700mA	24V	36V	
GW KAHLB2.EM	700mA	34V	36V	AC25CD700AT2Q	700mA	24V	36V	
GW KAHLB2.DM	1050mA	35V	38V	AC40CD1.05A2S	1050mA	23V	38V	
GW KAHLB2.PM	700mA	34V	36V	AC25CD700AT2Q	700mA	24V	36V	
GW KAHQB2.EM	1500mA	35V	37V	AC60CD1.4A2S	1400mA	26V	43V	
GW KAHQB2.PM	1500mA	35V	37V	AC60CD1.4A2S	1400mA	26V	43V	
SolarIQ S 13								
GW KAGJB2.EM	500mA	33V	37V	AC40CD1.05AT2S	500mA			
GW KAGLB2.EM	700mA	33V	37V	AC40CD1.05AT2S	700mA			
GW KAGJB2.CM	500mA	33V	37V	AC40CD1.05AT2S	500mA			
GW KAGLB2.CM	700mA	33V	37V	AC40CD1.05AT2S	700mA			
GW KAGJB3.CM	500mA	33V	37V	AC40CD1.05AT2S	500mA	23V	38V	
GW KAGJB3.DM	500mA	33V	37V	AC40CD1.05AT2S	500mA			
GW KAGJB3.EM	500mA	33V	37V	AC40CD1.05AT2S	500mA			
GW KAGMB3.CM	700mA	33V	37V	AC40CD1.05AT2S	700mA			
GW KAGMB3.DM	700mA	33V	37V	AC40CD1.05AT2S	700mA			
GW KAGMB3.EM	700mA	33V	37V	AC40CD1.05AT2S	700mA			
GW KAGMB3.PM	700mA	33V	37V	AC40CD1.05AT2S	700mA			