



ADVENTURE POWER®

UPG No. 41505

This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

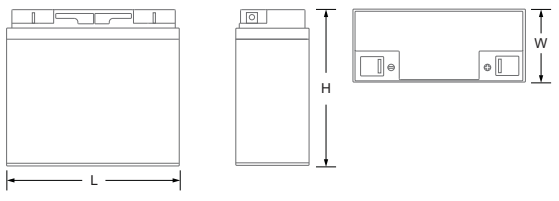



6N2A-2C-3 Conventional Battery

Specification

Nominal Voltage	6 Volts
Nominal Capacity (10H-R)	2 Ah
Approximate Weight (With Acid)	1.15 lbs. (0.52 kgs)
Recommended Maximum Charging Current Limit	0.6A
Equalization and Cycle Service	7.4 VDC/unit Average at 25°C
Cycle Life (JIS D 5302:2004)	200
Terminal Type	W



Physical Dimensions: in (mm)

 <p>L: 2.78" (70.6mm) H: 4.06" (103mm) W: 1.77" (45mm) All data subject to change without notice.</p>	<h4>Terminal Configuration</h4> 	<h4>Polarity</h4>  <h4>Exhaust</h4> 
--	--	---



Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 0.5 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the 6V 500mah dual stage regulated battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com

VR110509