



ADVENTURE POWER[®]

UPG No. 41506

6N4-2A

Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

Specification

Nominal Voltage	6 Volts
Nominal Capacity (10H-R)	4 Ah
Approximate Weight (With Acid)	1.54 lbs. (0.70 kgs)
Recommended Maximum Charging Current Limit	1.2A
Equalization and Cycle Service	7.4 VDC/unit Average at 25°C
Cycle Life (JIS D 5302:2004)	375
Terminal Type	R



Physical Dimensions: in (mm)

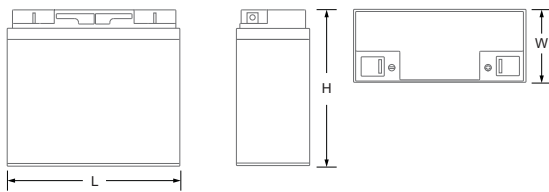


L: 2.80" (71.1mm) **H:** 3.78" (96mm) **W:** 2.80" (71.1mm)
All data subject to change without notice.

Terminal Configuration



Polarity




Exhaust



Front



Side



Terminals

Filling Instructions

- ⦿ Before filling, ensure your new battery is the correct size for your vehicle.
- ⦿ Once the battery is filled, it cannot be returned to vendor.
- ⦿ Only use the acid pack that comes with your battery.
- ⦿ Fill all cells to the "FULL" mark and wait 30 minutes.
- ⦿ After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- ⦿ Replace the sealer caps before charging the battery.

Charging Instructions

- ⦿ Charge the battery fully before installing.
- ⦿ Never charge this battery with a charger that delivers more than 1 amp of current. Larger chargers will harm the battery.
- ⦿ For optimum performance, UPG recommends charging and maintaining with the 6V 500mah dual stage regulated battery charger.
- ⦿ This charger/ maintainer can remain connected to the battery indefinitely.

www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com

VR110509