



PLT & Shoplight With Sensor Installation Instructions

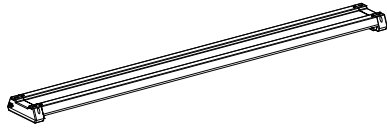

LED Portable Luminaire

Rated: 120V-60Hz 40W
4 UNITS MAXIMUM

PACKAGE CONTENTS

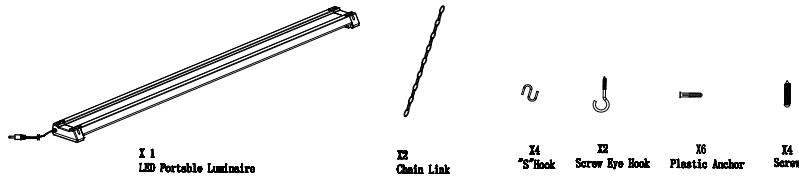

READ ALL THE INSTRUCTIONS AND SAVE THIS INSTRUCTION SHEET. NOT READING THE INSTRUCTIONS MAY CAUSE RISK OF FIRE OR PERSONAL INJURY

CAUTION: To reduce the risk of fire, electric shock or injury to people:

Turn off the switch and circuit breaker before installing this LED lamp.


- Suitable for dry locations.
- Not for use with dimmers.
- Install directly beneath a ceiling-mounted receptacle.
- Use only insulated staples or plastic ties to secure the cord. The power cord is 4.9 feet long
- Not intended for recessed installation or in ceiling.
- Do not install directly over a heat source (stove, etc.)
- Use safety precautions. Safety eye glasses and gloves are recommended.
- Installation should not be made on a radiant-heating ceiling.
- Injury to people and damage to the lamp and/or mounting surface may result if the lamp is pulled from the surface. To reduce the likelihood of such injury or damage, mount only on a mechanically sound surface.
- Do not alter the plug or power supply cord in any way or try to install this product in any other method besides methods shown on this sheet.

NOTE:


1. This fixture complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
2. To install onto a plaster board surface, plaster board requires minimum 3/8" thick.

STYLE 1 SUSPENSION INSTALLATION INSTRUCTIONS:


1. Mounting surface must be capable of supporting the fixture. If the surface is made of plaster board, we recommend that you use minimum #8 screw eye hooks with plastic anchors (included) or expansion bolts (not included). If installed onto a plaster board surface, We recommend minimum 3/8" thick.

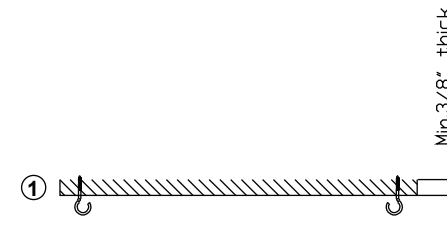


2. Install the 2 plastic anchors 47 1/4" apart, then screw the eye hook into each anchor.




3. Install one "S" hook into each end of the chain, then crimp the "S" hook end which is attached to the chain with pliers. (Leave one side open from the "S" hook) Repeat step for the second chain provided.




4. Install the "S" hook from one end of the chain into the end cap of the LED lamp, then crimp the hooks end with pliers. Repeat same step for the opposite side.

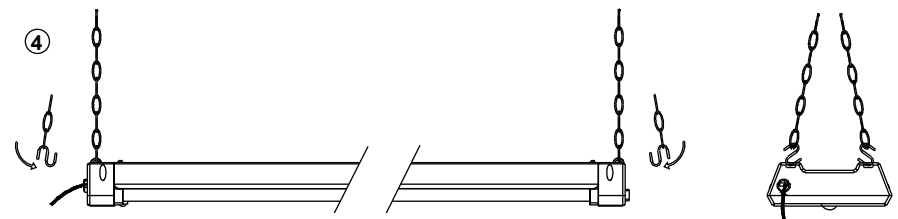

5. Install the LED lamp with chains, one end at a time onto each screw eye hook. Once installed, crimp each of the "S" hooks end with pliers. Please noted the on/off pull chain is 9.8 inches long.

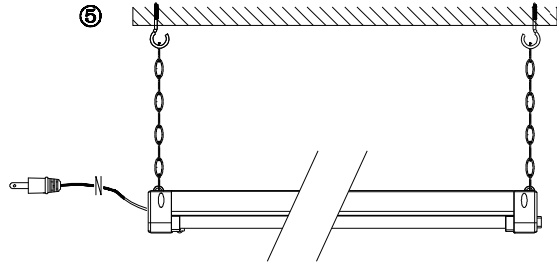


6. Plug the power supply cord into the electrical outlet.




STYLE 2 SURFACE MOUNT INSTALLATION INSTRUCTIONS:


1. Mounting surface must be capable of supporting the fixture. If the surface is made of plaster board, we recommend that you use minimum #8 screw eye hooks with plastic anchors (included) or expansion bolts (not included). If installed onto a plaster board surface, We recommend minimum 3/8" thick.

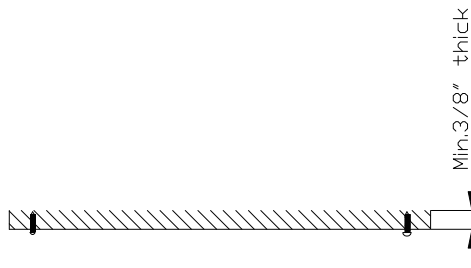


2. Install the 4 plastic anchors 46 1/2" apart and 3.189" apart, then screw into each anchor. Spacing between ceiling and cap nut should be at least 1/3".

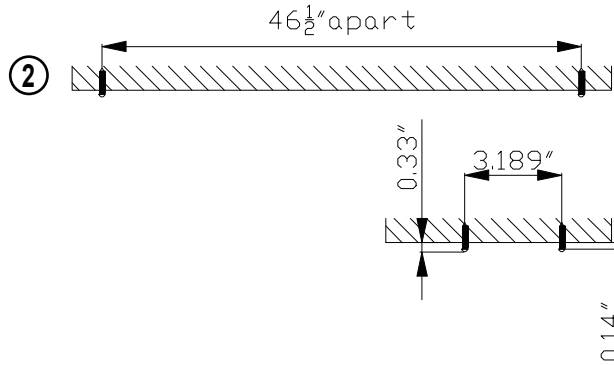


3. Lift fixture up to screws and slide to one side to secure into place. Screw size:ST4X30.

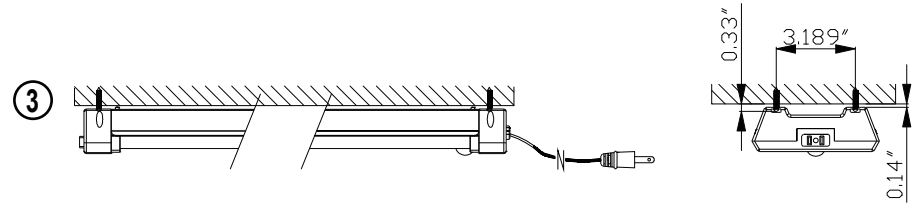

4. Plug the power supply cord into the electrical outlet.



LINKING MULTIPLE SHOPLIGHTS

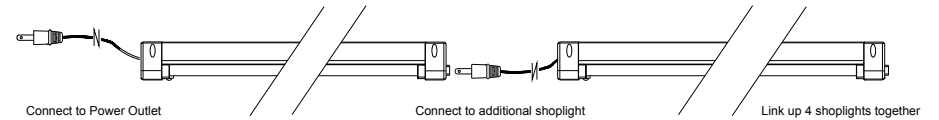

STYLE 1 AND STYLE 2 INFRARED SENSOR RANGE

When the sensor is mounted at the recommended 9.2~11.5 foot height, motion will be detected in the following areas:

