

# SL-SWL-G2 LED SOLAR WALL PACK LIGHT | ALL-IN-ONE DESIGN



WARRANTY



CHARGE TIME



BATTERY LIFE



EFFICACY



5 MIN FAST MOUNTING



MOTION SENSOR PHOTOCELL



INGRESS PROTECTION



CRI



RATED LIFE


## easy light, no wiring

anti-theft  
installation




RP-SWL-15W

motion sensor  
and photocell



adjust solar panel angle  
to maximize sunlight &  
allow snow to slide off



3 operating modes  
that are programmable  
via remote control or  
on fixture



| PART #               | UPC          | COMPARABLE TO  | WATTAGE | LUMENS | LPW | CCT (K) |
|----------------------|--------------|----------------|---------|--------|-----|---------|
| SL-SWL-7W-40K-BK-G2  | 844006050597 | UP TO 50W HID  | 7       | 700    | 100 | 4000    |
| SL-SWL-15W-40K-BK-G2 | 844006050603 | UP TO 100W HID | 15      | 1500   | 100 | 4000    |


RemPhos by Light Efficient Design  
lighting on target

# SL-SWL-G2


LED SOLAR WALL PACK LIGHT | ALL-IN-ONE DESIGN




RP-SWL-7W-40K-BK-G1

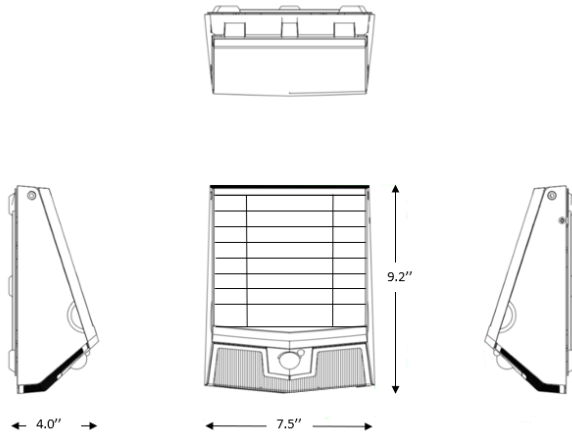

RP-SWL-15W-40K-BK-G1

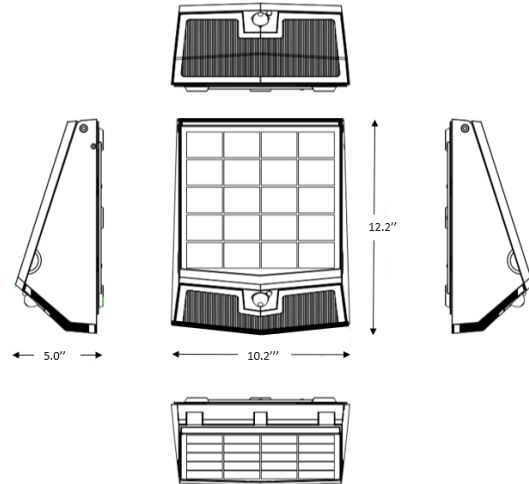

## ADJUSTABLE ANGLE DETAIL

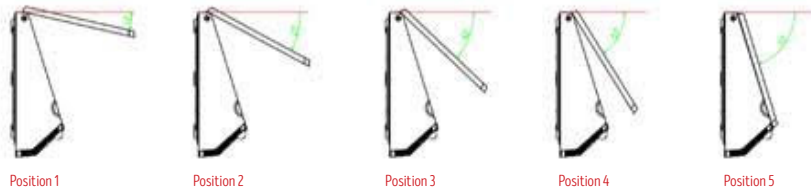

### Relationship between the panel angle and latitudes:

If the latitude you are installing in is from 0° ~ 25°, the tilt angle should be placed in position 1

If the latitude is from 26° ~ 40° the tilt angle should be set to position 2 or 3

If the latitude is from 41° ~ 55° the tilt angle should be set to position 4

If the latitude is > 55° the tilt angle should be set at position 5

## OPERATING MODES

1. The main light will automatically turn on at dusk and remain at 50% brightness when the motion sensor is disabled. After 5 hours or when the battery capacity is below 30%, the lamp will switch to Mode 3.
2. The main light will automatically turn on to full brightness when motion is detected in the range of 24ft, it will turn off after 20 seconds when there is no motion detected. The bottom portion of the lamp will turn on automatically when the main light turns off and then turn off once motion is detected.
3. The main light will turn on to full brightness when motion is detected in the range of 24ft. Once no motion is detected for 20 seconds, the lamp will turn off. The bottom portion of the lamp will not turn on in this mode.

## PART NUMBER BUILDER

| MFR | PRODUCT | WATTAGE   | COLOR | BRACKET | GEN |
|-----|---------|-----------|-------|---------|-----|
| SL  | SWL     | 7W<br>15W | 40K   | BK      | G2  |

## ORDERING EXAMPLE

RP-SWL-7W-40K-BK-G1

## ORDERING GUIDE

| CASE QTY | QUICK SHIP | DLC | REMPHOS PART #       | QUICK SHIP UPC CODE | LUMEN OUTPUT (LM) | WATTAGE (W) | LPW | WARRANTY (YRS) | RECOMMENDED MOUNTING HEIGHT (FT) |
|----------|------------|-----|----------------------|---------------------|-------------------|-------------|-----|----------------|----------------------------------|
| 1        | ●          | N/A | SL--SWL-7W-40K-BK-G2 | 844006050597        | 700               | 7           | 100 | 3              | 10-25FT                          |
| 1        | ●          | N/A | SL-SWL-15W-40K-BK-G2 | 844006050603        | 1500              | 15          | 100 | 3              | 10-25FT                          |

**RemPhos** by Light Efficient Design  
lighting on target