



AP SERIES POWERSPORTS BATTERIES

STANDARD CONVENTIONAL

UPG No. 41517
AP6N5.5-1D
Equivalent to 6N5.5-1D

Specification


Nominal Voltage	6 Volts
Nominal Capacity (10H-R)	5.5 Ah
Approximate Weight (With Acid)	1.28 lbs. (0.58 kgs)
Recommended Maximum Charging Current	0.55 A
Maximum Charging Voltage	7.4 V @ 25°C
Terminal Type	M
Warranty	1 Year Full Replacement



Physical Dimensions: in (mm)

L: 3.50" (89.0 mm) W: 2.76" (70.1 mm) H: 3.90" (99.0 mm)

Due to continuous improvements to our products, product may vary slightly from depiction.

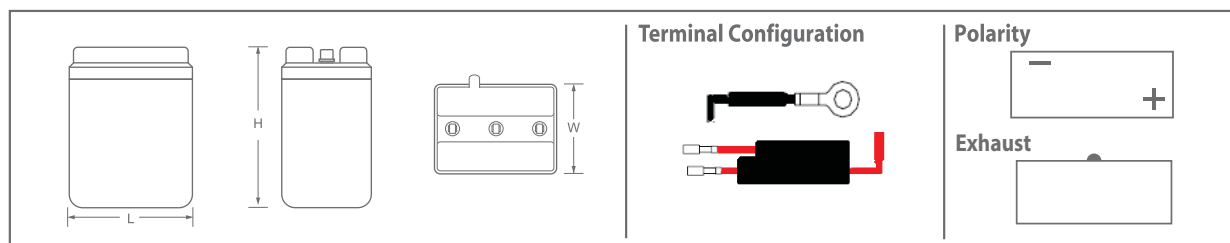

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than .55 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with our 6V 500mA dual stage regulated charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

Kinetik® is a registered trademark of Universal Power Group, Inc. All specifications are subject to change without notice.