



# ADVENTURE POWER<sup>®</sup>

UPG No. 42539

## U60-N24-A

Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

### Specification

<b>Nominal Voltage</b>	12 Volts
<b>Nominal Capacity (10H-R)</b>	28 Ah
<b>Approximate Weight (With Acid)</b>	17.2 lbs. (7.8 kgs)
<b>Recommended Maximum Charging Current Limit</b>	8.4A
<b>Equalization and Cycle Service</b>	14.8 VDC/unit Average at 25°C
<b>Cycle Life (JIS D 5302:2004)</b>	225
<b>Terminal Type</b>	J




### Physical Dimensions: in (mm)

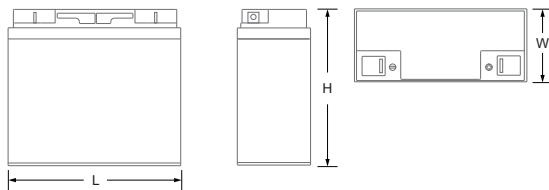

**L:** 7.24" (184mm) **H:** 6.89" (175mm) **W:** 4.88" (124mm)  
All data subject to change without notice.

### Terminal Configuration



### Polarity



Front



Side



Terminals

### Filling Instructions

- ⊕ Before filling, ensure your new battery is the correct size for your vehicle.
- ⊕ Once the battery is filled, it cannot be returned to vendor.
- ⊕ Only use the acid pack that comes with your battery.
- ⊕ Fill all cells to the "FULL" mark and wait 30 minutes.
- ⊕ After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- ⊕ Replace the sealer caps before charging the battery.

### Charging Instructions

- ⊕ Charge the battery fully before installing.
- ⊕ Never charge this battery with a charger that delivers more than 8 amps of current. Larger chargers will harm the battery.
- ⊕ For optimum performance, UPG recommends charging and maintaining with the Energizer<sup>®</sup> Maintainer 4000 battery charger.
- ⊕ This charger/ maintainer can remain connected to the battery indefinitely.

[www.upgi.com](http://www.upgi.com)

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@upgi.com](mailto:sales@upgi.com)

VR110409