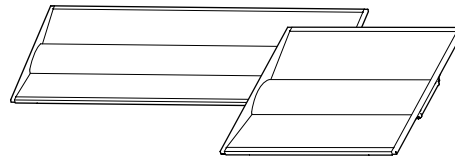




Questions?

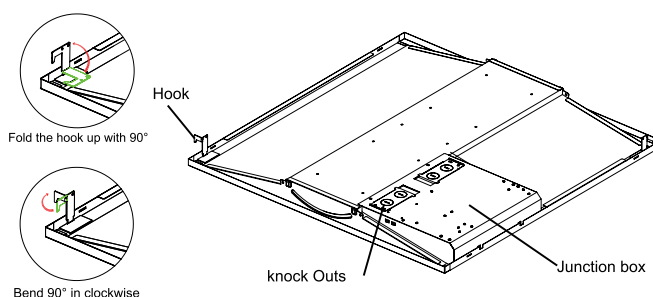
















For customer service please call us at 1-310-787-1100
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday
E-mail: info@eurilighting.com



LED Troffer

2 ft. x 2 ft.
2 ft. x 4 ft.

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

IMPORTANT	WARNING				
<ul style="list-style-type: none"> • Read Carefully before installing the fixture. Keep these instructions for future reference. • Thoroughly inspect the fixture for any freight damage; Freight damage should be reported to delivery carrier. • The fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. • This product MUST be installed in accordance with the applicable installation code by an electrician familiar with the construction and operation of the product. 	<ul style="list-style-type: none"> • RISK OF ELECTRIC SHOCK: Make sure power supply is OFF before installing or cleaning fixture. No user serviceable parts inside. Do NOT use the fixture within high humidity conditions. • Keep away from flammable and explosive environment. • Do NOT cover the fixture with insulation liner or similar material. • Do NOT install where the fixture is loose or only partially supported. • Do NOT impact or exert pressure on the fixture surface face or rear, as damage might occur. • Suggested minimum clearance is 211 mm after installation. 				
INSTALLATION					
<h3>WIRING GUIDE</h3> <ol style="list-style-type: none"> 1. Wire input end of the LED driver to supply wires using connector according to wiring section. Wire connections must be insulated. 2. Connect the BLACK/BROWN lead to LINE(+) supply lead. 3. Connect the WHITE/BLUE lead to NEUTRAL/Common (-) supply lead. 4. Connect the GREEN lead to GROUND supply lead. 5. If any, connect PURPLE/BLUE to 0-10V SIGNAL supply lead and GREY/WHITE to 0-10V NEUTRAL/REFERENCE supply lead. 	<h3>HOOK INSTALLATION</h3> <ol style="list-style-type: none"> 1. Fold the hook up with 90°, make it perpendicular to the Troffer. 2. Bend the end of the hook to the right with 90°. 3. Attach the hook on the housing onto the T-Bar. 				
 <p>• DISCONNECT POWER BEFORE INSULATING OR SERVICING</p> <p>• ALL ELECTRICAL WORK SHOULD BE COMPLETED BY QUALIFIED PERSONNEL AND MEET NATIONAL (NEC), REGIONAL AND LOCAL ELECTRICAL CODES.</p>	<h3>WIRING DIAGRAM</h3> <table border="0"> <tr> <td style="border: 1px solid black; padding: 5px;">ELECTRICAL SYSTEM</td> <td style="padding: 5px;">  BLACK/BROWN=HOT/LINE  WHITE/BLUE=NEUTRAL/Common  GREEN/YELLOW=GROUND </td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">0-10V DIMMING SYSTEM(IF ANY)</td> <td style="padding: 5px;">  PURPLE/BLUE=0-10V SIGNAL  GREY/WHITE=NEUTRAL/REFERENCE </td> </tr> </table>	ELECTRICAL SYSTEM	 BLACK/BROWN=HOT/LINE  WHITE/BLUE=NEUTRAL/Common  GREEN/YELLOW=GROUND	0-10V DIMMING SYSTEM(IF ANY)	 PURPLE/BLUE=0-10V SIGNAL  GREY/WHITE=NEUTRAL/REFERENCE
ELECTRICAL SYSTEM	 BLACK/BROWN=HOT/LINE  WHITE/BLUE=NEUTRAL/Common  GREEN/YELLOW=GROUND				
0-10V DIMMING SYSTEM(IF ANY)	 PURPLE/BLUE=0-10V SIGNAL  GREY/WHITE=NEUTRAL/REFERENCE				