



# ADVENTURE POWER<sup>®</sup>

UPG No. 42520

## UB12AL-A2 Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.



### Specification

<b>Nominal Voltage</b>	12 Volts
<b>Nominal Capacity (10H-R)</b>	12 Ah
<b>Approximate Weight (With Acid)</b>	8.38 lbs. (3.8 kgs)
<b>Recommended Maximum Charging Current Limit</b>	3.6A
<b>Equalization and Cycle Service</b>	14.8 VDC/unit Average at 25°C
<b>Cycle Life (JIS D 5302:2004)</b>	250
<b>Terminal Type</b>	F

### Physical Dimensions: in (mm)

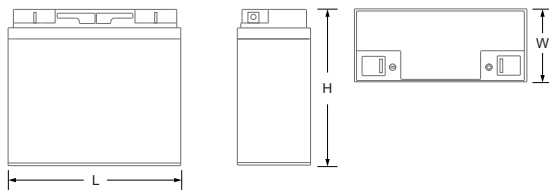

**L: 5.24" (133mm) H: 6.30" (160mm) W: 3.15" (80mm)**  
All data subject to change without notice.

### Terminal Configuration



### Polarity



### Exhaust



Front



Side



Terminals

### Filling Instructions

- ✦ Before filling, ensure your new battery is the correct size for your vehicle.
- ✦ Once the battery is filled, it cannot be returned to vendor.
- ✦ Only use the acid pack that comes with your battery.
- ✦ Fill all cells to the "FULL" mark and wait 30 minutes.
- ✦ After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- ✦ Replace the sealer caps before charging the battery.

### Charging Instructions

- ✦ Charge the battery fully before installing.
- ✦ Never charge this battery with a charger that delivers more than 4 amps of current. Larger chargers will harm the battery.
- ✦ For optimum performance, UPG recommends charging and maintaining with the Energizer<sup>®</sup> Maintainer 4000 battery charger.
- ✦ This charger/ maintainer can remain connected to the battery indefinitely.

[www.upgi.com](http://www.upgi.com)

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@upgi.com](mailto:sales@upgi.com)